

PELI LIMITED LIFETIME* GUARANTEE

Peli Products, S.L.U. ("Peli") guarantees its lights for a lifetime* against breakage or defects in workmanship. This guarantee does not cover the lamp or batteries. All warranty claims of any nature are barred if the case has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident.

For complete warranty details, see www.peli.com/warranty

*Lifetime guarantee not applicable where prohibited by law.

PELI 1 YEAR LIMITED GUARANTEE

Peli Products, S.L.U. ("Peli") guarantees its Remote Area Lighting Systems (RALS) against defects in materials and workmanship under normal use, service, and maintenance for a period of one year from the date of purchase. This warranty applies only to the original purchaser and is not transferable. All warranty claims of any nature are barred if the case has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident.

For complete warranty details, see www.peli.com/warranty

U.S.A.

U.S.A. & GLOBAL HEADQUARTERS

23215 Early Avenue
Torrance, CA 90505 USA
Tel 310.326.4700
800.473.5422 (Outside CA)
Fax 310.326.3311
www.pelican.com

EAST COAST

PELICAN HARDIGG
147 North Main Street
South Deerfield, MA 01373
Tel (800) 542 73 44
Fax (413) 665 8330
www.pelican.com

EMEA

EUROPE, MIDDLE EAST & AFRICA HEADQUARTERS

PELI PRODUCTS, S.L.U.
C/ Provença, 388 Planta 7
08025 • Barcelona, Spain
Tel +34 934 674 999
Fax +34 934 877 393
www.peli.com

GERMANY

PELI PRODUCTS GERMANY GmbH
Düsseldorf Kö-Bogen
Business Center
Königsallee 2b, 5th Floor
40212 Düsseldorf, Germany
Tel +49 (0) 211 882 42 401
Fax +49 (0) 211 882 42 200
www.peli.com

FRANCE

PELI PRODUCTS FRANCE
S.A.S.
20/22 Rue des Petits Hôtels
75010 Paris, France
Tel +33 (0)1 44 83 95 63
Fax +33 (0)1 44 83 95 68
www.peli.com

UK

PELI HARDIGG UK
Unit 4, Brookfield Industrial Estate
Leacon Road
Ashford Kent TN23 4TU
Tel + 44 (0) 1233 895 895
Fax +44 (0) 1233 895 899
www.peli.com

UAE

PELICAN PRODUCTS
MIDDLE EAST
JAFZA One Building A office 1511/1512
Jebel Ali Free Zone gate 5
P.O.Box 261008
Dubai – United Arab Emirates
Tel: +971 4 8876550
Fax: +971 4 8876549
www.pelican.com

* We also have offices in Canada, Japan, China, Australia, South Korea and India



LIGHTS CATALOGUE

REMOTE AREA LIGHTING SYSTEMS

SMALL LIGHTS

MEDIUM LIGHTS

LARGE LIGHTS

ATEX LIGHTS ZONE 0 & 1

TACTICAL LIGHTS

HEADLAMPS

RIGHT ANGLE LIGHTS

SPECIALTY LIGHTS



©2016 Peli Products, S.L.U. All trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., its subsidiaries and/or affiliates. Lexan® is a registered trademark of SABIC. iOS is a registered trademark of Apple, Inc. BLUETOOTH is a registered trademark of Bluetooth Sig, Inc. Android is a trademark of Google Inc. BLACK JACK™ is a trademark of 1445 Designs Corporation. 3M is a trademark of 3M Company

All details included in this catalogue are correct when printed but for most updated information please visit www.peli.com and www.pelicalogues.com

Part No. 0030-000-501E MAR16





DEAR CUSTOMER,

Lighting tools – they're a core element of every toolbox. They have a straightforward and simple purpose. Yet, when you're in a situation that requires a lighting tool, you want to make sure you have the right one. Peli understands the critical importance of this tool. We provide a wide range of advanced lighting systems to support professionals, outdoor enthusiasts and everyday do-it-yourself hobbyists. Regardless of the purpose, our lighting tools and remote area lighting systems enable you to accomplish your tasks in a safer and more efficient manner.

With this perspective, Peli relentlessly pursues innovation for new lighting tool products and manufacturing processes. We have adopted the ANSI FL-1 torch standards (see page 2) and continue to increase the number of industry leading safety certificates for specific models.

Our new lighting catalogue features multiple technology advances. These include state of the art LED performance upgrades, new electronic features, upgraded safety certificates and enhanced packaging. We are committed to environmentally responsible manufacturing, in fact most of our lights use LED bulbs that help protect our planet. LEDs are long lasting, promote extended battery life and allow for the latest technological advancements.

From basic models to the high-performance 9410L LED Lantern (our brightest handheld torch to date) and the 9470 Remote Area Lighting System (which delivers 12,000 lumens), we are ready to provide world-class support for our dealers and end users across the globe. And, all of this comes with Peli's industry-leading guarantee of excellence.

We invite you to look through our new catalogue and discover the ideal lighting tools for your specific needs.

CEO and President
Lyndon Faulkner

MARKETS SERVED//

Fire
Military
Industrial
Law Enforcement
Outdoor
Consumer



**TABLE
+ OF CONTENTS**

| | |
|---|--------------|
| Performance & ATEX | 2-3 |
| Remote Area Lighting Systems | 4-7 |
| Small Lights | 8-9 |
| Medium Lights | 10-12 |
| Large Lights | 13 |
| ATEX Lights Zone 0 & 1 | 14-17 |
| Tactical Lights | 18-19 |
| Headlamps | 20-23 |
| Right Angle Lights | 24-25 |
| Specialty Lights | 26 |
| Custom Labels Lighting Features | 27 |
| Light Mounting Systems Holster and Holder Styles | 28-29 |
| Specifications | 30-34 |
| Comparison US vs European Safety Classification | 35 |
| Full Line Overview | 36-37 |

www.peli.com

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO TORCHES ONLY)
All details included in this catalogue are correct when printed but for most updated information please visit www.peli.com and www.pelicatalogue.com


PERFORMANCE

STANDARDS AND RATINGS

(Applicable to torches only)

LIGHT OUTPUT

Light Output is the total luminous flux. It is the total quantity of emitted overall light energy as measured by integrating the entire angular output of the portable light source. Light output in this standard is expressed in units of lumens.

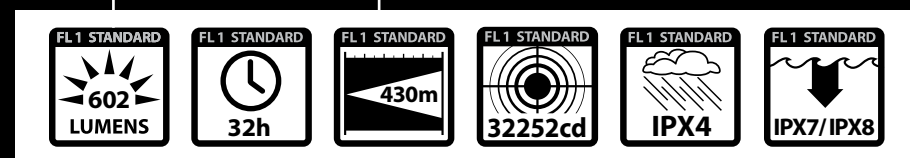

RUN TIME

Run Time is defined as the duration of time from the initial light output value – defined as 30 seconds after the point the device is first turned on – using fresh batteries, until the light output reaches 10% of the initial value.

BEAM DISTANCE

Beam Distance is defined as the distance from the device at which the light beam is 0.25 lux (0.25 lux is approximately the equivalent of the light emitted from the full moon "on a clear night in an open field").

PEAK BEAM INTENSITY


Peak Beam Intensity is the maximum luminous intensity typically along the central axis of a cone of light. The value is reported in candela and does not change with distance.

WATER RESISTANT

Water Resistant – IPX4 Water splashed against the device from any direction shall have no harmful effects.

WATER PROOF/SUBMERSIBLE

Water Proof // IPX7 – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under standardized conditions of pressure and time. **Submersible // IPX8** – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is continuously immersed in water under conditions which shall be stated by manufacturer, but which are more severe than for IPX7.

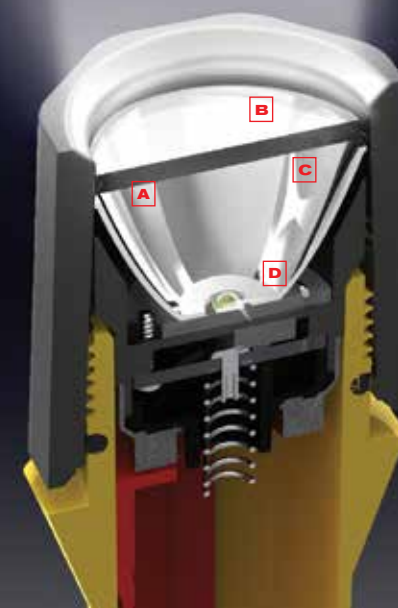

NEW DEEP MOUNT LED TECHNOLOGY

Our engineering team has designed a new high performance LED lamp module (Deep Mount LED Module). These lights are now brighter, with close to 100% increase in lumens and a 2.5 times increase in lux value over previous versions (as well as offering a more robust design).

- A** New deep dish reflector provides up to 2.5 times lux increase, and 100% lumen increase
- B** Robust, over-moulded polycarbonate lens won't yellow
- C** Opti-mechanical design gathers and focuses 100% of the light
- D** LED is mounted directly to the PCB board, creating a strong and efficient design solution

SAFETY

IS MY TORCH CORRECTLY CERTIFIED BY ATEX?

To meet the exacting requirements of ATEX directive 94/9/EC, Peli Lights are tested to ensure that they pose no threat of ignition when operating within hazardous locations. Using approved laboratories, the lights are tested to ensure that they will withstand rigorous impact and drop tests, severe environmental exposure and meet a minimum of IP54 water and dust ingress protection. Longevity and safety are assured by design. Each light certified by ATEX should have a code printed on its body. This code advises the user as to the area in which it can be safely used without risk of explosion.

Need more information about ATEX? Please visit www.peli.com

CE  II 1 G EX IA OP IS IIC T6/T4 GA *

* ATEX code corresponding to the 1930Z0 torch



ANSI STANDARDS (AMERICAN NATIONAL STANDARDS INSTITUTE)

Why create standards? While Peli was one of the first manufacturers to use quantifiable test procedures, the need was recognised to develop a common language that customers could use to select the right torch for their specific needs. As a result, the American National

Standards Institute (ANSI), with input from the torch industry, developed performance standards and symbols to effectively communicate a light's features and benefits. The Resulting ANSI/NEMA FL 1 Standards include the following six criteria.

GLOSSARY OF TERMS

CANDELA A unit of measurement of the intensity of light that is emitted by a light source in a particular direction.


LUX The unit of luminous flux in the International System, equal to the amount of light given out through a solid angle by a source of one candela intensity radiating equally in all directions.

LUMEN A unit of measurement of the amount of brightness that comes from a light source. Lumens define "luminous flux," which is energy within the range of frequencies we perceive as light.

INTEGRATING SPHERE An integrating sphere is a measurement device with an entrance port that can accept all the directional light output of the device under test, or can totally enclose the device itself. The walls of the sphere should be highly diffuse with high reflectivity (>80%) and the spectroradiometer should be shielded from direct view of the device under test by a baffle system.

IP (INGRESS PROTECTION) – These ratings specify the environmental protection the enclosure provides. The IP rating normally has two numbers (IPXX).

The first number represents protection from solid objects or materials (dust) where as the second number represents protection from liquids (water). With the IP rating IP 54, 5 describes the level of protection from solid objects and 4 describes the level of protection from liquids as described by the IP Rating System (Solids vary from 0-6 IP rating , Liquids vary from 0-8 IP rating).


RECHARGEABLE Denotes a torch which contains rechargeable batteries and charging station. These models are shown with the rechargeable icon. 

RAALS

REMOTE AREA LIGHTING SYSTEMS

Providing increased performance, safer working conditions, emergency preparedness and greater flexibility, Peli's RAALS line is the modern alternative to generator based lighting:

- Silent performance
- No exhaust fumes
- No flammable fuel
- Remote activation
- Eliminated trip hazards
- ATEX certified safety models

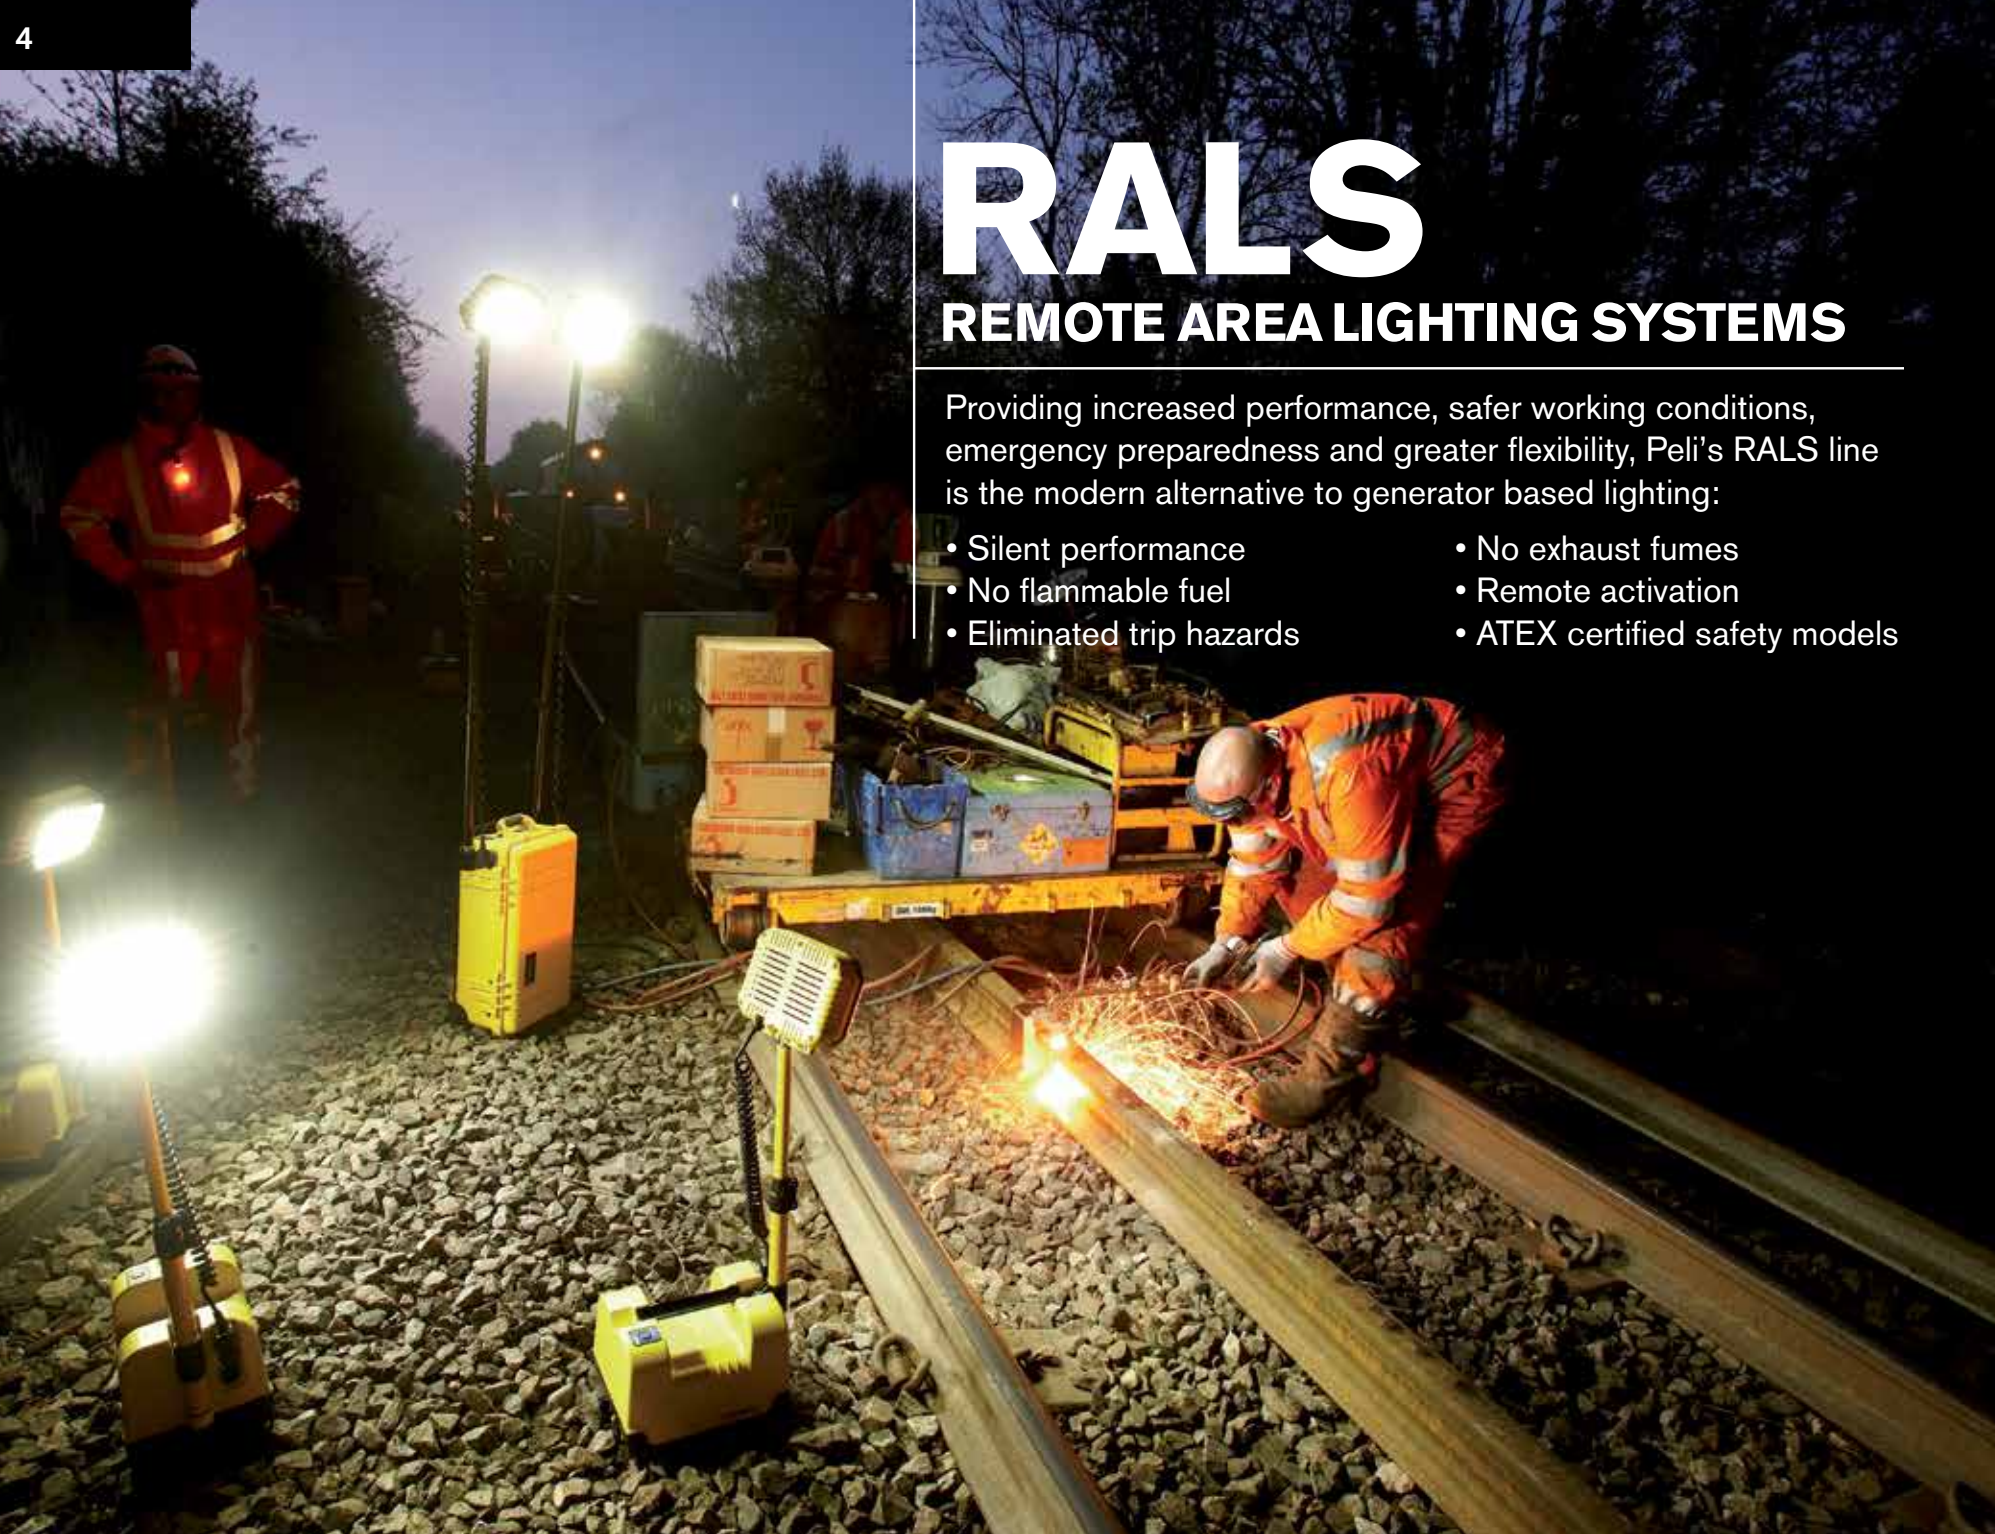

9000 RALS

LIGHT SOURCE LED
BATTERIES//4 AA Alkaline (included)
DIMENSIONS//8.00" x 5.00" x 2.25"
 (20.3 x 12.7 x 5.7 cm)
MODES// High / Medium / Low
BEAM SPREAD// 110°, 2 LEDs

LUMENS
 200
 RUN TIME
 UP TO
 80h



9420XL RALS

LIGHT SOURCE LED
BATTERIES//Lithium ion
DIMENSIONS//29" (73.6 cm) Closed,
 62" (157.4 cm) Deployed
MODES// High / Low
BEAM SPREAD// 58°, 2 LEDs per head

LUMENS
 1000
 RUN TIME
 UP TO
 4h



9430 RALS

LIGHT SOURCE//LED
BATTERIES//Sealed Lead Acid
DIMENSIONS//15.75" (40 cm) Closed,
 32.28" (82 cm) Extended
MODES// High / Low
BEAM SPREAD// 125°, 6 LEDs

LUMENS
 3000
 RUN TIME
 UP TO
 15h



9430SL SPOT LIGHT RALS

LIGHT SOURCE//LED
BATTERIES//Sealed Lead Acid
DIMENSIONS//15.75" (40 cm) Closed,
 32.28" (82 cm) Extended
MODES// High / Low
BEAM SPREAD// 10°, 24 LEDs

LUMENS
 2000
 RUN TIME
 UP TO
 15h



9435 SAFETY LIGHT RALS

LIGHT SOURCE//LED
BATTERIES//NiMH
DIMENSIONS//15.75" (40 cm) Closed,
 32.28" (82 cm) Extended
MODES// High / Low
BEAM SPREAD// 90°, 18 LEDs
CERTIFICATIONS// C1, D2 / II 3 G Ex ic IIC T4 Gc

LUMENS
 1500
 RUN TIME
 UP TO
 10h
 SAFETY CERTIFIED



9440 RALS

LIGHT SOURCE//LED
BATTERIES//Lithium-Ion
DIMENSIONS//37.4" (95 cm) Closed,
 85" (215.8 cm) Extended
MODES// High / Medium / Low
BEAM SPREAD// 125°, 12 LEDs

LUMENS
 5300
 RUN TIME
 UP TO
 8h



9500 SHELTER LIGHTING SYSTEM

LIGHT SOURCE//LED
INPUT VOLTAGE//12 - 30vdc or 110-240vac
DIMENSIONS//20.62" (52.4 cm) Closed, 157.5" (399.9 cm) Extended
LIGHT OUTPUT// 6000 (White LED) Per Head, 1200 (Red LED) Per Head
BEAM SPREAD// 210° Diffused, 36 LEDs per head 24 White/12 Red,
 3 lamp heads
PELI CASE// Included

LUMENS
 6000
 UP TO



Select between white light
 or red night vision mode



9460/9460RS RALS

LIGHT SOURCE// LED
BATTERIES// Sealed Lead Acid
DIMENSIONS// 22" (55.9 cm) Closed,
 70.87" (179.9 cm) Deployed
MODES// Variable
BEAM SPREAD// 120°, 6 LEDs per head, 2 lamp heads



LUMENS
6000
 RUN TIME
40h
 UP TO



INTELLIGENT CONTROL SYSTEM
 calculates and displays current battery life,
 allowing the user to regulate the intensity
 of the light and choose the desired run time.



9460

9460RS

9470/9470RS RALS

LIGHT SOURCE// LED
BATTERIES// Sealed Lead Acid
DIMENSIONS// 24.83" (63 cm) Closed, 72.85" (185 cm) Deployed
MODES// Variable
BEAM SPREAD// 120°, 6 LEDs per head, 4 lamp heads



LUMENS
12000
 RUN TIME
40h
 UP TO



INTELLIGENT CONTROL SYSTEM
 calculates and displays current battery life,
 allowing the user to regulate the intensity
 of the light and choose the desired run time.



9470

9470RS



9460RS, 9470RS FEATURES



12V POWER SUPPLY
 12 volt power supply port can
 be used to power any electrical
 product that utilizes a standard
 12v vehicle style connector
 (up to 4 amps).



MULTI-TERRAIN TROLLEY
 large 3,8 cm (1.5") polyurethane
 wheels allow for easier transport
 across rough surfaces. Moulded
 feet level and stabilize case.



REMOTE CONTROL
 allows for activation
 and deactivation from
 over 18 m (16 ft) away.

9490 RALS

9480 RALS

LIGHT SOURCE// LED
BATTERIES// Sealed Lead Acid
DIMENSIONS// 15.50" (39.4 cm) Closed,
 23.75" (60.3 cm) Deployed
MODES// High/ Medium / Low / Flashing
BEAM SPREAD// 125°, 8 LEDs



LUMENS
4000
 RUN TIME
28h
 UP TO



Bluetooth

9490 RALS


LIGHT SOURCE// LED
BATTERIES// Sealed Lead Acid
DIMENSIONS// 20" (50.8 cm) Closed, 72" (182.9 cm) Deployed
MODES// High / Medium / Low / Flashing / (6000-Variable)
BEAM SPREAD// 125°, 10 LEDs



LUMENS
6000
 RUN TIME
24h
 UP TO



INTELLIGENT CONTROL SYSTEM
 calculates and displays current battery
 life, allowing the user to
 regulate the intensity
 of the light and choose
 the desired run time.

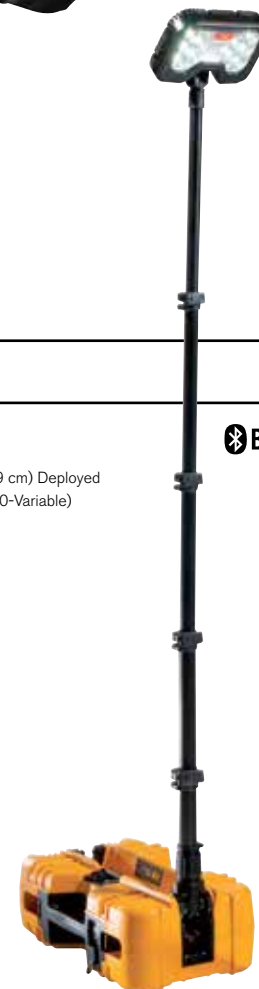

Bluetooth



SWAPPABLE POWER PACK
 Swappable power
 pack w/12v aux.
 port adapter powers
 smartphones,
 laptops, etc.



BATTERY LEVEL INDICATOR
 Full time battery
 level indication.



BLUETOOTH™ CONTROL
 Bluetooth app
 controls multiple
 units and variable
 light from
 0-100% output.
 Free App for iOS™
 and Android™.



SMALL LIGHTS

When compact is a must or just a convenience, choose from Peli's range of powerful lights. Whether composite or alloy, certified or coloured, you'll find the perfect model for your next job.

1810

LIGHT SOURCE//
LED

BATTERIES//
4 LR 41 Alkaline (included)

LENGTH//
1.50" (3.8 cm)



LUMENS
16
RUN TIME
8h 30m



MITYLITE™ 1900

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
2 AAA Alkaline (included)

LENGTH//
4.09" (10.4 cm)



CERTIFICATIONS//
CI, D1/CII, D2



LUMENS
11
RUN TIME
1h 30m



MITYLITE™ 1900Z1

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
2 AAA Alkaline (included)

LENGTH//
4.09" (10.4 cm)



CERTIFICATIONS//
II 2 G Ex e ib IIB T4 Gb, II 2 D Ex ib IIIC T100°C Db



LUMENS
11
RUN TIME
1h 30m



1910

LIGHT SOURCE//
LED

BATTERIES//
1 AAA Alkaline (included)

LENGTH//
3.8" (9.7 cm)

MODES//
High / Low



LUMENS
72
RUN TIME
4h



L1™ 1930

LIGHT SOURCE//
LED

BATTERIES//
4 LR 44 Alkaline (included)

LENGTH//
2.64" (6.7 cm)

CERTIFICATIONS//
CI, D1/CII, D2



LUMENS
12
RUN TIME
4h 15m



VB3 2220Z1

LIGHT SOURCE//
LED

BATTERIES//
2 CR2032 Lithium (included)

LENGTH//
3.50" (8.9 cm)

CERTIFICATIONS//
II 2 G Ex ib op is IIC T6 Gb



LUMENS
9
RUN TIME
34h



1920

LIGHT SOURCE//
LED

BATTERIES//
2 AAA Alkaline (included)

LENGTH//
5.5" (14.0 cm)

MODES//
High / Low



LUMENS
120
RUN TIME
8h 30m



L1 1930Z0

LIGHT SOURCE//
LED

BATTERIES//
4 LR 44 Alkaline (included)

LENGTH//
2.64" (6.7 cm)

CERTIFICATIONS//
II 1 G Ex ia op is IIC T6/T4 Ga



LUMENS
12
RUN TIME
4h 15m



MITYLITE™ 2300

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
2 AA Alkaline (included)

LENGTH//
5.62" (14.3 cm)

CERTIFICATIONS//
CI, D1/CII, D2



LUMENS
11
RUN TIME
4h 30m



MITYLITE™ 2340

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
2 AA Alkaline (not included)

LENGTH//
6.25" (15.9 cm)

CERTIFICATIONS//
CI II, D2



LUMENS
10
RUN TIME
4h 30m



*For more information on the ATEX Zone 0 & 1 lights, see page 34-35

*For more information on the ATEX Zone 0 & 1 lights, see page 34-35

MEDIUM LIGHTS

Nothing beats the versatility of a hand-held light. Easy to carry, stash in a pocket, or clip to a helmet, these lights do just about everything. And when hazardous areas are present, you can count on Peli's line of safety certified lighting tools. You'll even find photoluminescent models with "glow-in-the-dark" material to help you find your torch in an emergency.

Photo by Miguel Roque

PELILITE™ 1800

LIGHT SOURCE//
Incandescent (Xenon)
BATTERIES//
2 C Alkaline (not included)
LENGTH//
6" (15.2 cm)
CERTIFICATIONS//
CI II, D2



SABERLITE™ 2010

LIGHT SOURCE//
LED
BATTERIES//
3 C Alkaline (not included)
LENGTH//
8.11" (20.6 cm)
CERTIFICATIONS//
CI II III, D1



STEALTHLITE™ 2400Z1

LIGHT SOURCE//
Incandescent (Xenon)
BATTERIES//
4 AA Alkaline (included)
LENGTH//
6.49" (16.5 cm)
CERTIFICATIONS//
II 2 G Ex e ib IIC T4 Gb



SABRELITE™ 2000

LIGHT SOURCE//
Incandescent (Xenon)
BATTERIES//
3 C Alkaline (not included)
LENGTH//
7.79" (19.8 cm)
CERTIFICATIONS//
CI, D1/CI, D2



SABRELITE™ 2010ZO

LIGHT SOURCE//
LED
BATTERIES//
3 C Alkaline (not included)
LENGTH//
8.11" (20.6 cm)
CERTIFICATIONS//
II 1 G Ex ia IIC T4 T3 Ga, II 1 D ia IIC T135c T200c Da IP6X



STEALTHLITE™ 2410 LED

LIGHT SOURCE//
LED
BATTERIES//
4 AA Alkaline (included)
LENGTH//
7" (17.8 cm)
CERTIFICATIONS//
CI II III, D1



SABRELITE™ 2000Z1

LIGHT SOURCE//
Incandescent (Xenon)
BATTERIES//
3 C Alkaline (not included)
LENGTH//
7.79" (19.8 cm)
CERTIFICATIONS//
II 2 G Ex e ib IIC T4 Gb, II 2 G Ex e ib IIC T150°C Gb



STEALTHLITE™ 2400

LIGHT SOURCE//
Incandescent (Xenon)
BATTERIES//
4 AA Alkaline (included)
LENGTH//
6.49" (16.5 cm)
CERTIFICATIONS//
CI, D1/CI, D2



STEALTHLITE™ 2410ZO

LIGHT SOURCE//
LED
BATTERIES//
4 AA Alkaline (included)
LENGTH//
7" (17.8 cm)
CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIC T135°C Da



*For more information on the ATEX Zone 0 & 1 lights, see page 34-35

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO TORCHES ONLY)
All details included in this catalogue are correct when printed but for most updated information please visit www.peli.com and www.pelicatalogue.com

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO TORCHES ONLY)
All details included in this catalogue are correct when printed but for most updated information please visit www.peli.com and www.pelicatalogue.com

STEALTHLITE™ 2450



LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
4 NiMH (included)

LENGTH//
6.5" (16.5 cm)

CERTIFICATIONS//
CI II, D2



| | |
|------------------|---------------|
| SAFETY CERTIFIED | LUMENS |
| | 35 |
| RUN TIME | 3h 30m |

STEALTHLITE™ 2460Z1



LIGHT SOURCE//
LED

BATTERIES//
4 NiMH (included)

LENGTH//
7" (17.8 cm)

CERTIFICATIONS//
II 2 G Ex ib IIC T4 Gb



| | |
|------------------|---------------|
| SAFETY CERTIFIED | LUMENS |
| | 112 |
| RUN TIME | 4h 30m |

3310 ELS (EMERGENCY LIGHTING SYSTEM)

LIGHT SOURCE//
LED

BATTERIES//
3 AA Alkaline (included)

LENGTH//
6.14" (15.6 cm)

INCLUDES//
3310PL and Wall Mountable Case
(torch body glows in the dark)

■ (Photoluminescent)



| | |
|------------------|-------------|
| SAFETY CERTIFIED | LUMENS |
| | 234 |
| UP TO | 190h |

STEALTHLITE™ 2460



LIGHT SOURCE//
LED

BATTERIES//
4 NiMH (included)

LENGTH//
7" (17.8 cm)

CERTIFICATIONS//
CI II, D2



| | |
|------------------|------------|
| SAFETY CERTIFIED | LUMENS |
| | 183 |
| RUN TIME | 5h |

**3310PL
PHOTOLUMINESCENT**

LIGHT SOURCE//
LED

BATTERIES//
3 AA Alkaline (included)

LENGTH//
6.14" (15.6 cm)

MODES//
High / Low / Flashing
(torch body glows in the dark)

■ (Photoluminescent)



| | |
|------------------|-------------|
| SAFETY CERTIFIED | LUMENS |
| | 234 |
| UP TO | 190h |

3315Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AA Alkaline (included)

LENGTH//
6.14" (15.6 cm)

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga,
II 1 D Ex ia IIIC T130°C Da



| | |
|------------------|------------|
| SAFETY CERTIFIED | LUMENS |
| | 138 |
| RUN TIME | 19h |

3315RZ1



LIGHT SOURCE//
LED

BATTERIES//
Lithium-Ion (included)

LENGTH//
6.11" (15.5 cm)


CERTIFICATIONS//
II 2G ib op is IIC T4 Gb,
II 1G ia op is IIC T3 Ga



| | |
|------------------|------------|
| SAFETY CERTIFIED | LUMENS |
| | 176 |
| RUN TIME | 48h |

LARGE LIGHTS

Colossal performance with lightweight designs. Features such as full time battery level indication, articulating light head and multiple light modes keep you in control of the job. Peli is also a leader of high performance lithium-ion technology in portable lighting.

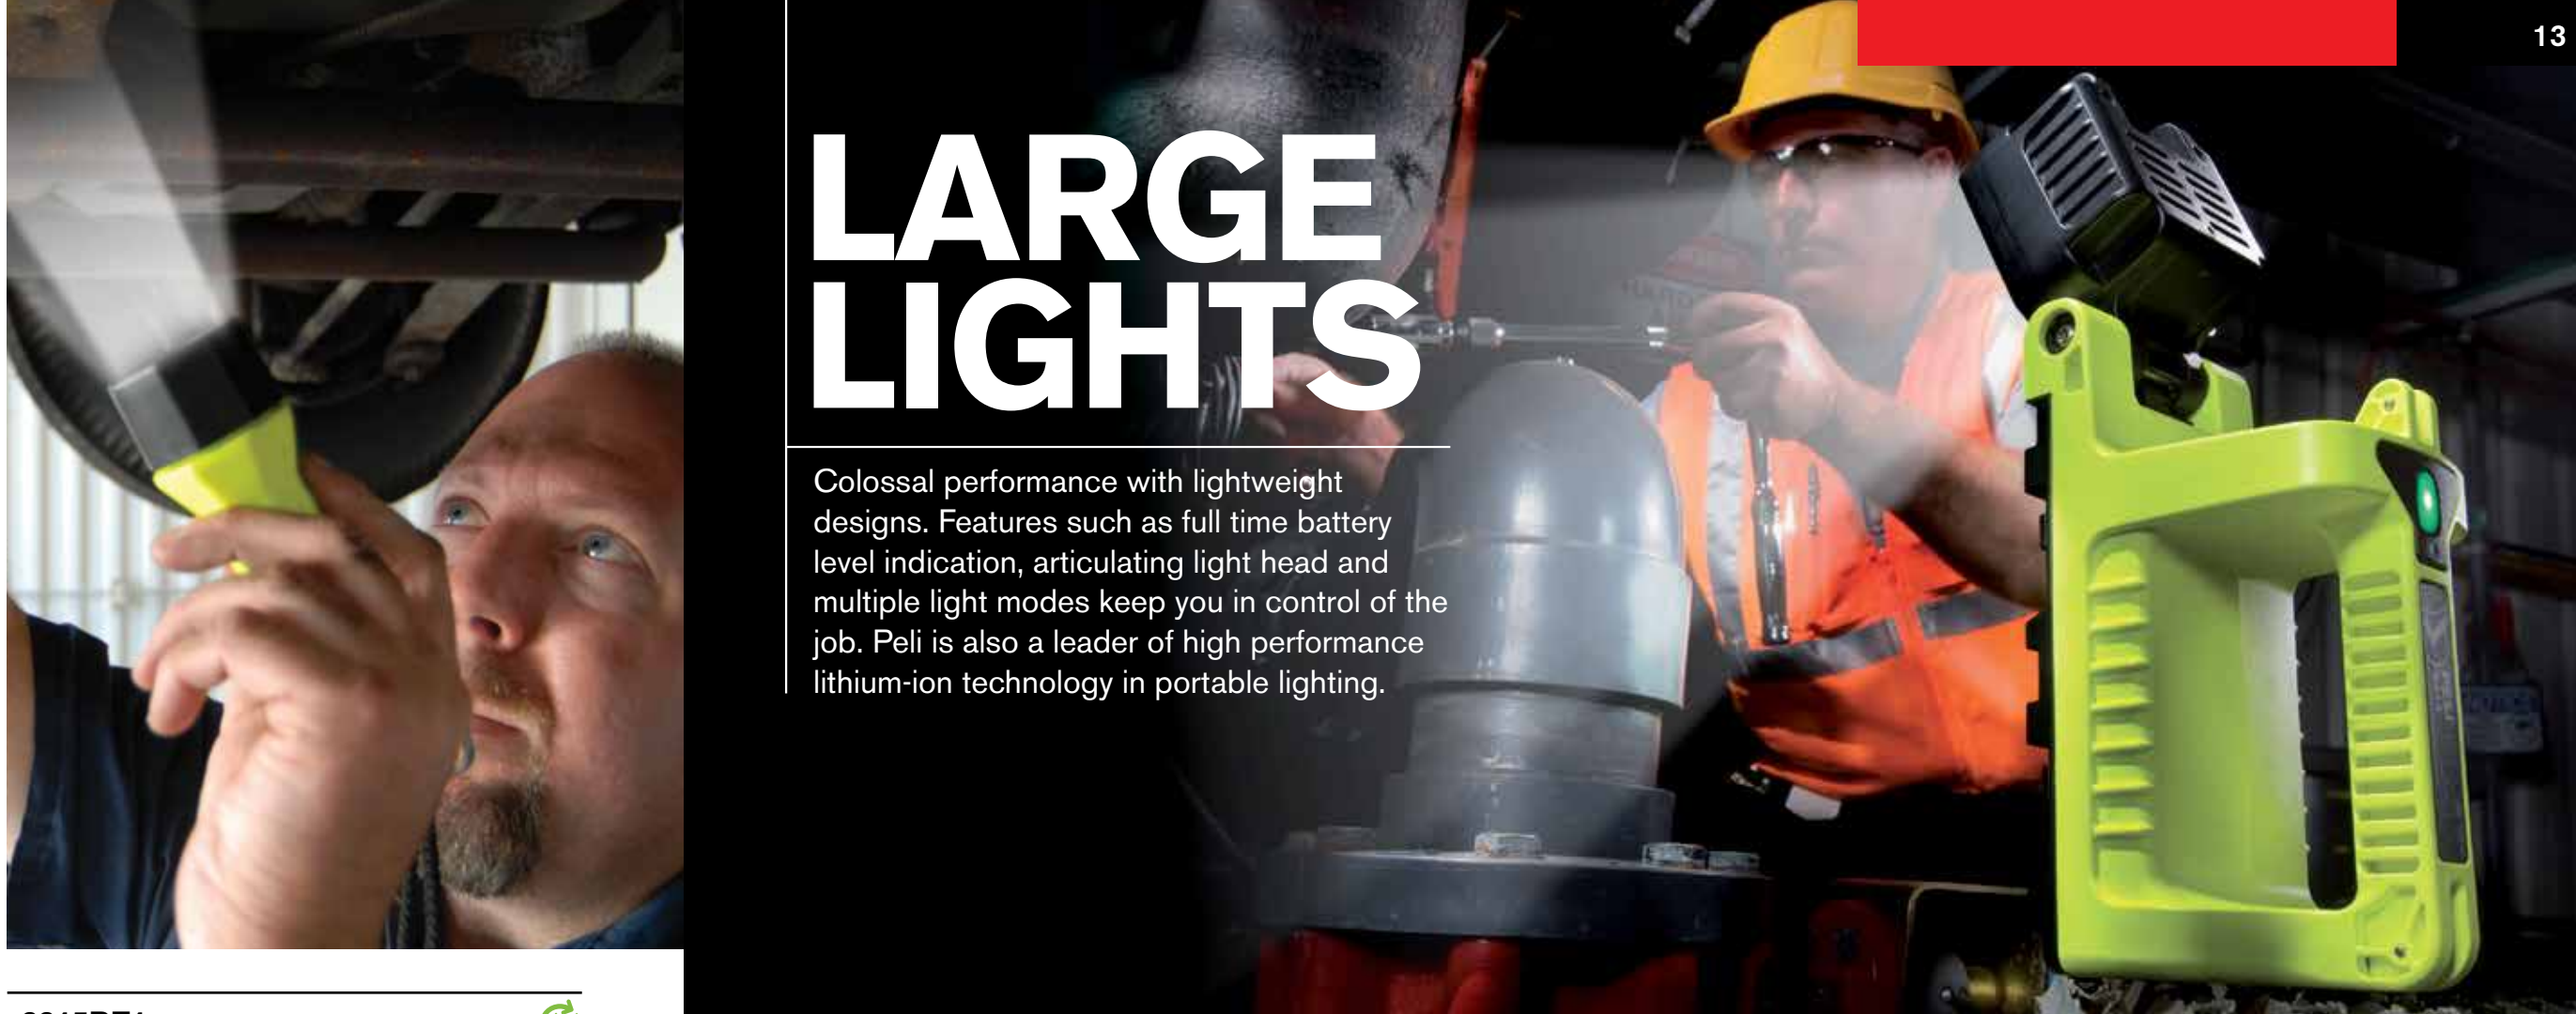

9410L LED LANTERN



LIGHT SOURCE//
LED

BATTERIES//
Lithium-Ion (included)

LENGTH//
8.75" (22.2 cm)

MODES//
High / Low / Flashing.
Full Time Battery Indicator



| | |
|------------------|----------------|
| SAFETY CERTIFIED | LUMENS |
| | 1203 |
| UP TO | 10h 30m |

9415Z0 LED LANTERN



LIGHT SOURCE//
LED

BATTERIES//
4 D NiMH (included)

LENGTH//
8.75" (22.2 cm)

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga



| | |
|------------------|------------|
| SAFETY CERTIFIED | LUMENS |
| | 392 |
| RUN TIME | 11h |

*For more information on the ATEX Zone 0 & 1 lights, see page 34-35

*For more information on the ATEX Zone 0 & 1 lights, see page 34-35

ATEX LIGHTS



Zone 0 & 1 (Cat. 1 & 2)

Peli's extense range of Zone 0 and Zone 1 torches complies with the highest standards of the ATEX Directive and meet the IEC (International Electrotechnical Commission) requirements. Designed for use in hazardous areas, professionals working in the pharmaceutical, fire and rescue, hazmat and other high-risk industries can be confident that Peli offers the safety approvals needed for a large variety of risky situations.



MITYLITE™ 1900Z1

LIGHT SOURCE//
Incandescent (Xenon)
BATTERIES//
2 AAA Alkaline (included)
LENGTH//
4.09" (10.4 cm)
CERTIFICATIONS//
II 2 G Ex e ib IIB T4 Gb, II 2 D Ex ib IIIC T100°C Db



SAFETY CERTIFIED
LUMENS
11
RUN TIME
1h 30m

SABRELITE™ 2000Z1

LIGHT SOURCE//
Incandescent (Xenon)
BATTERIES//
3 C Alkaline (not included)
LENGTH//
7.79" (19.8 cm)
CERTIFICATIONS//
II 2 G Ex e ib IIC T4 Gb, II 2 G Ex e ib IIC T150°C Gb



SAFETY CERTIFIED
LUMENS
39
RUN TIME
6h



Photoluminescent 2003PL Shroud

STEALTHLITE™ 2400Z1

LIGHT SOURCE//
Incandescent (Xenon)
BATTERIES//
4 AA Alkaline (included)
LENGTH//
6.49" (16.5 cm)
CERTIFICATIONS//
II 2 G Ex e ib IIC T4 Gb



SAFETY CERTIFIED
LUMENS
38
RUN TIME
4h 30m

L1 1930Z0

LIGHT SOURCE//
LED
BATTERIES//
4 LR 44 Alkaline (included)
LENGTH//
2.64" (6.7 cm)
CERTIFICATIONS//
II 1 G Ex ia op is IIC T6/T4 Ga



SAFETY CERTIFIED
LUMENS
12
RUN TIME
4h 15m

SABRELITE™ 2010Z0

LIGHT SOURCE//
LED
BATTERIES//
3 C Alkaline (not included)
LENGTH//
8.11" (20.6 cm)
CERTIFICATIONS//
II 1 G Ex ia IIC T4 T3 Ga, II 1 D ia IIIC T135c T200c Da IP6X



SAFETY CERTIFIED
LUMENS
129
RUN TIME
22h



Photoluminescent 2013PL Shroud

STEALTHLITE™ 2410Z0

LIGHT SOURCE//
LED
BATTERIES//
4 AA Alkaline (included)
LENGTH//
7" (17.8 cm)
CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da



SAFETY CERTIFIED
LUMENS
153
RUN TIME
5h 45m

MITYLITE™ 1965Z0

LIGHT SOURCE//
LED
BATTERIES//
2 AAA Alkaline
LENGTH//
5.48" (13.9 cm)
CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T90°C Da



SAFETY CERTIFIED
LUMENS
34
RUN TIME
3h 45m

VB3 2220Z1

LIGHT SOURCE//
LED
BATTERIES//
2 CR2032 Lithium (included)
LENGTH//
3.50" (8.9 cm)
CERTIFICATIONS//
II 2 G Ex ib op is IIC T6 Gb



SAFETY CERTIFIED
LUMENS
9
RUN TIME
34h

STEALTHLITE™ 2460Z1

LIGHT SOURCE//
LED
BATTERIES//
4 AA NiMH (included)
LENGTH//
7" (17.8 cm)
CERTIFICATIONS//
II 2 G Ex ib IIC T4 Gb



SAFETY CERTIFIED
LUMENS
112
RUN TIME
4h 30m

*For more information on the ATEX Zone 0 & 1 lights, see page 34-35



HEADSUP LITE™ 2610Z0

LIGHT SOURCE//
LED
BATTERIES//
3 AAA Alkaline (included)
LENGTH//
1.49" (3.8 cm)
CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga



| | |
|------------------|----------|
| SAFETY CERTIFIED | LUMENS |
| | 30 |
| SAFETY CERTIFIED | RUN TIME |
| | 47h |

HEADSUP LITE™ 2745Z0

LIGHT SOURCE//
LED
BATTERIES//
3 AAA Alkaline (included)
LENGTH//
2.25" (5.7 cm)
CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga



| | |
|------------------|----------|
| SAFETY CERTIFIED | LUMENS |
| | 33 |
| SAFETY CERTIFIED | RUN TIME |
| | 40h |

HEADSUP LITE™ 2765Z0

LIGHT SOURCE//
LED
BATTERIES//
3 AAA Alkaline (included)
LENGTH//
2.25" (5.7 cm)
CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga



| | |
|------------------|----------|
| SAFETY CERTIFIED | LUMENS |
| | 105 |
| SAFETY CERTIFIED | RUN TIME |
| | 9h |

NEW

HEADSUP LITE™ 2690Z0

LIGHT SOURCE//
LED
BATTERIES//
3 AAA Alkaline (included)
LENGTH//
2.81" (7.1 cm)
CERTIFICATIONS//
I M1 Ex ia I Ma, II 1 G Ex ia IIC T4 Ga,
II 1 D Ex ia IIIC T65°C Da



| | |
|------------------|----------|
| SAFETY CERTIFIED | LUMENS |
| | 74 |
| SAFETY CERTIFIED | RUN TIME |
| | 11h |

HEADSUP LITE™ 2755Z0

LIGHT SOURCE//
LED
BATTERIES//
3 AAA Alkaline (included)
LENGTH//
2.25" (5.7 cm)
CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga



| | |
|------------------|----------|
| SAFETY CERTIFIED | LUMENS |
| | 72 |
| SAFETY CERTIFIED | RUN TIME |
| | 15h |

HEADSUP LITE™ 2785Z1

LIGHT SOURCE//
LED
BATTERIES//
4 AA Alkaline (included)
LENGTH//
3.00" (7.6 cm)
CERTIFICATIONS//
II 2 G Ex ib IIC T4 Gb



| | |
|------------------|----------|
| SAFETY CERTIFIED | LUMENS |
| | 215 |
| SAFETY CERTIFIED | RUN TIME |
| | 109h |

NEW

3315Z0

LIGHT SOURCE//
LED
BATTERIES//
3 AA Alkaline (included)
LENGTH//
6.14" (15.6 cm)
CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga,
II 1 D Ex ia IIIC T130°C Da



| | |
|------------------|----------|
| SAFETY CERTIFIED | LUMENS |
| | 138 |
| SAFETY CERTIFIED | RUN TIME |
| | 19h |

LITTLE ED™ 3660Z1

LIGHT SOURCE//
LED
BATTERIES//
4 AA NIMHA (included)
LENGTH//
7.51" (19.1 cm)
CERTIFICATIONS//
II 2 G Ex ib IIC T4 Gb



| | |
|------------------|----------|
| SAFETY CERTIFIED | LUMENS |
| | 176 |
| SAFETY CERTIFIED | RUN TIME |
| | 3h 45m |

3765Z0

LIGHT SOURCE//
LED
BATTERIES//
4 AA NIMH
LENGTH//
5.36" (13.6 cm)
CERTIFICATIONS//
II 1 G Ex ia op is IIC T3 Ga



| | |
|------------------|----------|
| SAFETY CERTIFIED | LUMENS |
| | 237 |
| SAFETY CERTIFIED | RUN TIME |
| | 20h |

NEW

3315RZ1

LIGHT SOURCE//
LED
BATTERIES//
Lithium-Ion
LENGTH//
6.11" (15.5 cm)
CERTIFICATIONS//
II 2G ib op is IIC T4 Gb,
II 1G ia op is IIC T3 Ga



| | |
|------------------|----------|
| SAFETY CERTIFIED | LUMENS |
| | 176 |
| SAFETY CERTIFIED | RUN TIME |
| | 48h |

3715Z0

LIGHT SOURCE//
LED
BATTERIES//
4 AA Alkaline
LENGTH//
5.36" (13.6 cm)
CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130c Da



| | |
|------------------|----------|
| SAFETY CERTIFIED | LUMENS |
| | 189 |
| SAFETY CERTIFIED | RUN TIME |
| | 31h |



Photoluminescent
3713PL Shroud

9415Z0 LED LANTERN

LIGHT SOURCE//
LED
BATTERIES//
4 D NIMH (included)
LENGTH//
8.75" (22.2 cm)
CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga



| | |
|------------------|----------|
| SAFETY CERTIFIED | LUMENS |
| | 392 |
| SAFETY CERTIFIED | RUN TIME |
| | 11h |

LITTLE ED™ 3610Z0

LIGHT SOURCE//
LED
BATTERIES//
4 AA Alkaline (included)
LENGTH//
7.51" (19.1 cm)
CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da



| | |
|------------------|----------|
| SAFETY CERTIFIED | LUMENS |
| | 153 |
| SAFETY CERTIFIED | RUN TIME |
| | 5h 45m |



*For more information on the ATEX Zone 0 & 1 lights, see page 34-35

*For more information on the ATEX Zone 0 & 1 lights, see page 34-35

TACTICAL LIGHTS

Peli's tactical lights are field ready and built to withstand the hard knocks that come with the job. The lights are presented pre-focused to provide a beam of very bright central light and long-range, surrounded by one of lower intensity for better peripheral vision.

M6 2320

LIGHT SOURCE//
Incandescent (Xenon)
BATTERIES//
2 CR123 Lithium-Ion (included)
LENGTH//
5.51" (14 cm)



LUMENS
82
RUN TIME
1h 15m

2350

LIGHT SOURCE//
LED
BATTERIES//
1 AA Alkaline (included)
LENGTH//
4.23" (10.7 cm)
MODES//
High / Strobe / Low



LUMENS
100
RUN TIME
15h

2360 LED

LIGHT SOURCE//
LED
BATTERIES//
2 AA Alkaline (included)
LENGTH//
6.2" (15.7 cm)
MODES//
High / Strobe / Low



LUMENS
250
RUN TIME
19h

2370

LIGHT SOURCE//
LED
BATTERIES//
2 AA Alkaline (included)
LENGTH//
6.43" (16.3 cm)
MODES//
High / Low / Red / Blue



LUMENS
106
RUN TIME
41h 15m

2380R

LIGHT SOURCE//
LED
BATTERIES//
Lithium-Ion (included)
LENGTH//
6.48" (16.5 cm)
MODES//
High / Strobe / Low
Spot To Flood



LUMENS
305
RUN TIME
25h



2380

LIGHT SOURCE//
LED
BATTERIES//
2 AA Alkaline (included)
LENGTH//
6.44" (16.4 cm)
MODES//
High / Low
Spot To Flood



LUMENS
159
RUN TIME
13h

PM6 3330 (SPECIAL ORDERS ONLY)

LIGHT SOURCE//
LED
BATTERIES//
2 CR123 Lithium-Ion (included)
LENGTH//
5.27" (13.4 cm)



LUMENS
90
RUN TIME
4h 45m

7000

LIGHT SOURCE//
LED
BATTERIES//
2 CR123 Lithium-Ion (Included)
LENGTH//
5.31" (13.5 cm)
MODES//
High / Strobe / Medium / Low
Self Programmable



LUMENS
602
RUN TIME
16h

7060

LIGHT SOURCE//
LED
BATTERIES//
Lithium-Ion (included)
LENGTH//
8.65" (22 cm)
MODES//
High / Strobe / Medium / Low
Self Programmable



LUMENS
368
RUN TIME
45h

M11 8050

LIGHT SOURCE//
Incandescent (Xenon)
BATTERIES//
NiMH (included)
LENGTH//
11.25" (28.6 cm)



LUMENS
164
RUN TIME
2h 15m

8060

LIGHT SOURCE//
LED
BATTERIES//
NiMH (included)
LENGTH//
12.67" (32.2 cm)
MODES//
High / Strobe / Medium / Low
Flashing / Self Programmable



LUMENS
803
RUN TIME
69h



HEADLAMPS

With up to 500 lumens, revolutionary downcast lighting, USB charging and battery level indication, these headlamps are packed with features. Other options, including night vision friendly red illumination, interchangeable body colours and multiple settings, make these headlamps your best partner for the dark.

HEADSUP LITE™ 2610Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
1.49" (3.8 cm)

CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga



HEADSUP LITE™ 2680

LIGHT SOURCE//
Recoil™ LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
4.64" (11.8 cm)

CERTIFICATIONS//
CI II III, D2



HEADSUP LITE™ 2690Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.81" (7.1 cm)

CERTIFICATIONS//
I M1 Ex ia I Ma, II 1 G Ex ia IIC T4 Ga,
II 1D Ex ia IIIC T65°C Da




2720 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.48" (6.3 cm)

MODES//
Variable Light Output / Spot to Flood /
Red Night Vision Friendly LEDs



**GESTURE
ACTIVATION
CONTROL**



2740 HEADLAMP


LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.25" (5.7 cm)

MODES//
High / Low /
Flashing / Red LED

■ □ ■ (Translucent Blue)



*For more information on the ATEX Zone 0 & 1 lights, see page 34-35

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO TORCHES ONLY)
All details included in this catalogue are correct when printed but for most updated information please visit www.peli.com and www.pelicatalogue.com

HEADSUP LITE™ 2745Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.25" (5.7 cm)

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga



2750 HEADLAMP


LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.25" (5.7 cm)

MODES//
High / Low / Flashing /
Red LED /
Low Battery Warning

■ □ ■ (Photoluminescent)



HEADSUP LITE™ 2755Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.25" (5.7 cm)

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga



2780R HEADLAMP




LIGHT SOURCE//
LED

BATTERIES//
Lithium-Ion (included)

LENGTH//
3.00" (7.6cm)

MODES//
High / Medium /
Low / Flashing / Downcast/
Full-time Battery
Level Indicator

■ □ ■ (Photoluminescent)
3 Interchangeable Covers Included



2760 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.25" (5.7 cm)

MODES//
High / Medium / Low /
Downcast / Flashing/
Red LED / Full-time Battery
Level Indicator

■ □ ■ (Translucent Red)



HEADSUP LITE™ 2765Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.25" (5.7 cm)

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga



2780 HEADLAMP


LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
3.00" (7.6 cm)

MODES//
High / Medium /
Low / Flashing / Downcast/
Full-time Battery
Level Indicator

■ □ ■ (Photoluminescent)
3 Interchangeable Covers Included



HEADSUP LITE™ 2785Z1

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
3.00" (7.6cm)

CERTIFICATIONS//
II 2 G Ex ib IIC T4 Gb



HEADLAMPS

*For more information on the ATEX Zone 0 & 1 lights, see page 34-35

*For more information on the ATEX Zone 0 & 1 lights, see page 34-35

RIGHT ANGLE LIGHTS

Firefighters put everything on the line and the correct lighting tools are critical. Right angle (90°) torches often worn on turnout coats offer hands-free performance. With extreme peak beam intensity and smoke-cutting penetration, these lights will get you in and out of tough situations safely.



VERSABRITE™ 2250

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
2 AA Alkaline (included)

LENGTH//
3.87" (9.8 cm)

CERTIFICATIONS//
Cl II, D2



LITTLE ED™ 3610Z0

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
7.51" (19.1 cm)

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da



LITTLE ED™ 3660Z1

LIGHT SOURCE//
LED

BATTERIES//
4 AA NIMHA (included)

LENGTH//
7.51" (19.1 cm)

CERTIFICATIONS//
II 2 G Ex ib IIC T4 Gb



3715Z0

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline

LENGTH//
5.36" (13.6 cm)

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130c Da



Photoluminescent
3713PL Shroud



3765Z0

LIGHT SOURCE//
LED

BATTERIES//
4 AA NiMH

LENGTH//
5.36" (13.6 cm)

CERTIFICATIONS//
II 1 G Ex ia op is IIC T3 Ga



NEW



Photo by Ricardo Alves

SPECIALTY LIGHTS

Whether directing fighter jets on the decks of aircraft carriers or protecting our troops with friend-or-foe infrared beacons, Peli manufactures quality lighting tools for many unique military applications. Also available, magnetically secured flexible neck designs for mechanics and red LED flashers that are helpful in keeping workers safe.

2365 FLEX NECK

LIGHT SOURCE//
LED
BATTERIES//
2 AA Alkaline (not included)
LENGTH//
21.92" (55.7 cm)

LUMENS
65
RUN TIME
7h
UP TO



CUSTOM LABELS

Peli Products offers the ultimate in private labeling. You can put your company name and logo or a special statement on many Peli lights. Our in-house private label molding and production department has complete short and long run capabilities for a variety of custom applications and custom colours. We have the latest hot stamping equipment, utilizing the world's most durable inks and foils in our screening, hot tipping, embossing, and moulding programs.



GRAPHIC DESIGN STUDIO

Our in-house graphics studio will take your logo and size it appropriately to the torch of your choice.



HOT STAMPING

Our hot stamping department, equipped with the latest technology in custom imprinting. Minimum quantities apply



100% ACCURACY

Peli's strict QA inspection team will check for quality of print and 100% accuracy in colour and placement.

PELI LIGHTING TOOLS: MORE THAN A TORCH.

Here are just a few features that make our lighting tools shine:



WIRELESS BLUETOOTH CONTROL
(On select models only)



SELF PROGRAMMABLE
(On select models only)



GESTURE ACTIVATION
(On select models only)



PHOTOLUMINESCENT DESIGNS
(On select models only)



BATTERY LEVEL INDICATION
(On select models only)



DOWNCAST LIGHTING FEATURES
(On select models only)



USB RECHARGEABLE
(On select models only)



LEGENDARY LIFETIME* GUARANTEE



INTELLIGENT CONTROL
(On select models only)

*Where applicable by law

LIGHT MOUNTING SYSTEMS AND HOLSTERS



CAT. NO. 610

FRONT SIGHT MOUNT

Fits Peli Lights -2320, 2330, 2390, 7000. Includes Remote Pressure Switch. For use with: AR15, M16, and M4 Carbine (special orders only).



CAT. NO. 630

FOREGRIP MOUNT

Fits Peli Lights - 2320, 2330, 2390, 7000. Includes Remote Pressure Switch. For use with: Heckler, and Koch MP5 (special orders only).



CAT. NO. 620

SIDE SLING MOUNT


Fits Peli Lights - 2320, 2330, 2390, 7000. Includes Remote Pressure Switch. For use with: AR15, M16, and M4 Carbine (special orders only).



CAT. NO. 2326

REMOTE PRESSURE SWITCH

Our tactical pressure switch replaces the standard tailcap on the torch. A 6" cord attached to a 2" pressure-sensitive switch mounts to the foregrip. Fits Peli Lights: 2320, 2330, 2390 (Cat. No. 2326). COLOUR : Black // WT.: 2.0 oz.

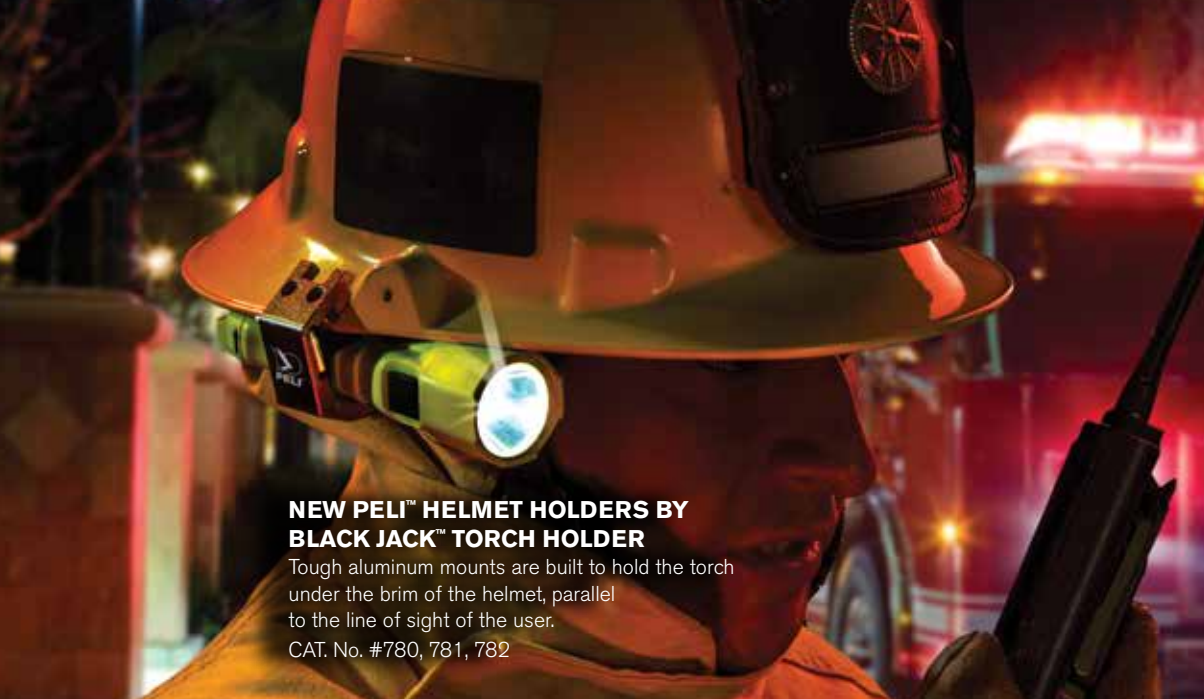

NEW PELI™ HELMET HOLDERS BY BLACK JACK™ TORCH HOLDER

Tough aluminum mounts are built to hold the torch under the brim of the helmet, parallel to the line of sight of the user. CAT. No. #780, 781, 782



NEW PELI™ HEAD STRAP RETAINERS BY BLACK JACK™

Set of four high temperature composite clips that utilize a 3M™ adhesive and will attach to any helmet. CAT. No. 783

LIGHT MOUNTING | HOLSTER | HOLDER STYLES

LIGHT MOUNTING | HOLSTER | HOLDER STYLES

| | CAT. NO. 2327 Nylon Holster | CAT. NO. 2357 Nylon Holster | CAT. NO. 2407 Nylon Holster | CAT. NO. 7078 Nylon Holster | CAT. NO. 8057 Nylon Holster |
|----------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| CAT NO. | | | | | |
| 2300 | • | | | | |
| 2320 | • | | | | |
| 2330 | • | | | | |
| 2360 | | • | | | |
| 2370 | | | | | |
| 2380 | | | | | |
| 2380R | | | | | |
| 2340/NVG | | • | | | |
| 2400/NVG | | | • | | |
| 2400PL | | | • | | |
| 2450 | | | • | | |
| 2410 | | | • | | |
| 2410PL | | | • | | |
| 2460 | | | • | | |
| 7000 | • | | | | |
| 7060 | | | | • | |
| 8040 | | | | | • |
| 8050 | | | | | • |

| | CAT. NO. 710 | CAT. NO. 711 | CAT. NO. 750 | CAT. NO. 770 | CAT. NO. 780 FULL HOUSE | CAT. NO. 781 ACE | CAT. NO. 782 ALL IN | CAT. NO. 783 DOUBLE DOWN |
|----------------------|--------------|--------------|--------------|--------------|----------------------------|---------------------|------------------------|-----------------------------|
| CAT NO. | | | | | | | | |
| 2140 | | | • | | | | | |
| 2250 | • | | | | | | | |
| 2300 | | | • | • | | • | | |
| 2320 | | | | • | | • | | |
| 2330 | | | | • | | • | | |
| 2340/NVG | | • | • | • | | • | | |
| 2350 | | | | | | • | | |
| 2360 | | | | | | • | | |
| 2370 | | | | | | • | | |
| 2380/2380R | | | | | | • | | |
| 2390 | | | | • | | • | | |
| 2400/2400N/NVG/PL | • | • | • | • | • | • | | |
| 2410/PL | • | • | • | • | • | • | | |
| 2430 | • | • | • | • | • | • | | |
| 2450 | • | • | • | • | • | • | | |
| 2460 | • | • | • | • | • | • | | |
| 3310 | | | | • | | | • | |
| 3315 | | | | • | | | • | |
| 3320 | | | | • | | • | | |
| 3330 | | | | • | | • | | |
| 7000 | | | | | | • | | |
| All Headlamps | | | | | | | | • |

| CAT NO. | BATTERIES (included) | WEIGHT W/ BATTERIES (KG) | LENGTH (CM) | LUMENS | RUN TIME | BEAM SPREAD | NUMBER OF LEDs | LAMP HEADS | CERTIFICATIONS | COLOURS |
|---------|--------------------------------|--------------------------|-----------------------------|---------------------------------|------------------------|-----------------|----------------|------------|---------------------------------|---------|
| 9000 | 4 AA Alkaline | 1.14 lbs. (0.52) | 8.0" (20.3) | 200*, 100**, 20*** | 4h*, 12h**, 80h*** | 110° | 2 | 1 | N/A | ■ ■ |
| 9420XL | Rechargeable Lithium ion | 8.4 lbs. (3.8) | 62.0" (157) ^A | 1000*, 500*** | 2h*, 4h*** | 58° | 2 | 1 | CE, RoHS | ■ |
| 9430 | Rechargeable, Sealed Lead Acid | 22.65 lbs. (10.27) | 32.28" (82) ^A | 3000*, 1500*** | 8h*, 15h*** | 125° | 6 | 1 | CE, RoHS | ■ ■ |
| 9430SL | Rechargeable, Sealed Lead Acid | 22.05 lbs. (10) | 32.28" (82) ^A | 2000*, 1000*** | 8h*, 15h*** | 10° | 24 | 1 | CE, RoHS | ■ |
| 9435 | Rechargeable NiMH | 17.6 lbs. (7.98) | 32.28" (82) ^A | 1500*, 750*** | 5h*, 10h*** | 90° | 18 | 1 | C1, D2 / II 3 G Ex ic IIC T4 Gc | ■ |
| 9440 | Rechargeable Lithium ion | 16.09 lbs. (7.3) | 85" (215.8) ^A | 5300*, 2800** 1400*** | 1h 30m*, 4h**, 8h*** | 125° | 12 | 1 | CE, RoHS | ■ ■ |
| 9460 | Rechargeable, Sealed Lead Acid | 55 lbs. (24.95) | 70.87" (179.9) ^A | 6000*, 2000*** (variable) | 7h*, 40h*** | 120° | 6 per head | 2 | CE, RoHS | ■ ■ |
| 9460RS | Rechargeable, Sealed Lead Acid | 58 lbs. (24.95) | 70.87" (179.9) ^A | 6000*, 500*** | 7h*, 40h*** | 120° | 6 per head | 2 | CE, RoHS | ■ ■ |
| 9470 | Rechargeable, Sealed Lead Acid | 104 lbs (47.2) | 72.85" (185) ^A | 12000*, 1000*** (variable) | 7h*, 40h*** | 120° | 6 per head | 4 | CE, RoHS | ■ ■ |
| 9470RS | Rechargeable, Sealed Lead Acid | 110 lbs (49.9) | 72.85" (185) ^A | 12000*, 4000*** | 7h*, 40h*** | 120° | 6 per head | 4 | CE, RoHS | ■ ■ |
| 9480 | Rechargeable, Sealed Lead Acid | 27.5 lbs. (12.47) | 23.75" (60.3) ^A | 4000*, 3000** 1000*** | 6h*, 8h**, 28h*** | 125° | 8 | 1 | N/A | ■ ■ |
| 9490 | Rechargeable, Sealed Lead Acid | 32 lbs. (14.51) | 72" (182.8) ^A | 6000 (variable) | 3h 30m*, 12h**, 24h*** | 125° | 10 | 1 | N/A | ■ ■ |
| 9500 | N/A | 29.8 lbs. (13.52) | 20.62" (52.4) | 6000 (white LED) 1200 (red LED) | constant 120V | 210° (diffused) | 36 | 3 | CE, RoHS | ■ |

| CAT NO. | BATTERIES | WEIGHT W/ BATTERIES (KG) | LENGTH (CM) | ANSI LIGHT OUTPUT | ANSI RUN TIME | ANSI BEAM DISTANCE (meters) | ANSI PEAK BEAM INTENSITY (candela) | ANSI IPX RATING | CERTIFICATIONS | COLOURS |
|---------|------------------------------|--------------------------|--------------|-------------------|--------------------|-----------------------------|------------------------------------|-----------------|---|-------------|
| 1810 | 4 LR 41 Alkaline (included) | 0.5 oz. (0.01) | 1.5" (3.8) | 16 | 8h 30m | 23 | 137 | IPX4 | N/A | ■ ■ ■ ■ ■ ■ |
| 1900 | 2 AAA Alkaline (included) | 1.6 oz. (0.05) | 4.09" (10.4) | 11 | 1h 30m | 45 | 571 | IPX7 | CI, D1/CII, D2 | ■ ■ ■ |
| 1900Z1 | 2 AAA Alkaline (included) | 1.6 oz. (0.05) | 4.09" (10.4) | 11 | 1h 30m | 45 | 571 | IPX7 | II 2 G Ex e ib IIB T4 Gb, II 2 D Ex ib IIIC T100°C Db | ■ ■ |
| 1910 | 1 AAA Alkaline (included) | 1.5 oz. (0.04) | 3.8" (9.7) | 72*, 14*** | 1h 45m*, 4h*** | 64*, 28*** | 1031*, 198*** | IPX7 | N/A | ■ ■ ■ ■ ■ ■ |
| 1920 | 2 AAA Alkaline (included) | 2.2 oz. (0.06) | 5.5" (14) | 120*, 12*** | 2h 45m*, 8h 30m*** | 87*, 27*** | 1893*, 184*** | IPX7 | N/A | ■ ■ ■ ■ ■ ■ |
| 1930 | 4 LR 44 Alkaline (included) | 0.9 oz. (0.03) | 2.64" (6.7) | 12 | 4h 15m | 17 | 70 | IPX4 | CI, D1/CII, D2 | ■ ■ |
| 1930Z0 | 4 LR 44 Alkaline (included) | 0.9 oz. (0.03) | 2.64" (6.7) | 12 | 4h 15m | 17 | 70 | IPX4 | II 1 G Ex ia op is IIC T6/T4 Ga | ■ |
| 1965Z0 | 2 AAA Alkaline (included) | 1.9 oz (0.05) | 5.48" (13.9) | 34 | 3h 45m | 45 | 512 | IPX7 | II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T90°C Da | ■ ■ |
| 2220Z1 | 2 CR2032 Lithium (included) | 1.0 oz (0.03) | 3.50" (8.9) | 9 | 34h | 12 | 38 | IPX4 | II 2 G Ex ib op is IIC T6 Gb | ■ ■ |
| 2300 | 2 AA Alkaline (included) | 3.4 oz. (0.1) | 5.62" (14.3) | 11 | 4h 30m | 43 | 478 | IPX4 | CI, D1/CII, D2 | ■ |
| 2340 | 2 AA Alkaline (not included) | 3.5 oz. (0.1) | 6.25" (15.9) | 10 | 4h 30m | 43 | 461 | IPX4 | CI II, D2 | ■ |

*High | **Medium | ***Low | ^A Extended Height | Additional approvals may apply. For details go to www.peli.com

| CAT NO. | BATTERIES | WEIGHT W/ BATTERIES (KG) | LENGTH (CM) | ANSI LIGHT OUTPUT | ANSI RUN TIME | ANSI BEAM DISTANCE (meters) | ANSI PEAK BEAM INTENSITY (candela) | ANSI IPX RATING | CERTIFICATIONS | COLOURS |
|---------|-------------------------------------|--------------------------|--------------|-------------------|---------------------|-----------------------------|------------------------------------|-----------------|--|----------------------|
| 1800 | 2 C Alkaline (not included) | 7.8 oz. (0.22) | 6" (15.2) | 21 | 7h | 131 | 4370 | IPX7 | CI II, D2 | ■ |
| 2000 | 3 C Alkaline (not included) | 12.8 oz. (0.36) | 7.79" (19.8) | 53 | 5h | 158 | 6234 | IPX7 | CI, D1/CII, D2 | ■ |
| 2000Z1 | 3 C Alkaline (not included) | 12.8 oz. (0.36) | 7.79" (19.8) | 39 | 6h | 177 | 7852 | IPX7 | II 2 G Ex e ib IIC T4 Gb, II 2 G Ex e ib IIC T150°C Gb | ■ ■ |
| 2010 | 3 C Alkaline (not included) | 13.4 oz. (0.38) | 8.11" (20.6) | 109 | 32h | 144 | 5189 | IPX7 | CI II III, D1 | ■ |
| 2010Z0 | 3 C Alkaline (not included) | 13.4 oz. (0.38) | 8.11" (20.6) | 129 | 22h | 135 | 4582 | IPX7 | II 1 G Ex ia IIC T4 T3 Ga, II 1 D ia IIIC T135°C T200c Da IP6X | ■ |
| 2400 | 4 AA Alkaline (included) | 7.1 oz. (0.2) | 6.49" (16.5) | 45 | 3h 45m | 125 | 3934 | IPX7 | CI, D1/CII, D2 | ■ |
| 2400Z1 | 4 AA Alkaline (included) | 7.1 oz. (0.2) | 6.49" (16.5) | 38 | 4h 30m | 156 | 6194 | IPX7 | II 2 G Ex e ib IIC T4 Gb | ■ ■ |
| 2410 | 4 AA Alkaline (included) | 7.3 oz. (0.21) | 7" (17.8) | 183 | 5h 45m | 184 | 8480 | IPX7 | CI II III, D1 | ■ |
| 2410Z0 | 4 AA Alkaline (included) | 7.3 oz. (0.21) | 7" (17.8) | 153 | 5h 45m | 165 | 6837 | IPX7 | II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da | ■ ■ |
| 2450 | Rechargeable NiMH (included) | 7.8 oz. (0.22) | 6.5" (16.5) | 35 | 3h 30m | 122 | 3735 | IPX7 | CI II, D2 | ■ ■ |
| 2460 | Rechargeable NiMH (included) | 7.8 oz. (0.22) | 7" (17.8) | 183 | 5h | 179 | 8050 | IPX7 | CI II, D2 | ■ ■ |
| 2460Z1 | Rechargeable NiMH (included) | 7.8 oz. (0.22) | 7" (17.8) | 112 | 4h 30m | 153 | 5828 | IPX7 | II 2 G Ex ib IIC T4 Gb | ■ |
| 3310PL | 3 AA Alkaline (included) | 6.2 oz. (0.18) | 6.14" (15.6) | 234*, 28*** | 8.75h 45m*, 190h*** | 240*, 81*** | 14500*, 1649*** | IPX7 | N/A | ■ (photoluminescent) |
| 3310ELS | 3 AA Alkaline (included) | 6.2 oz. (0.18) | 6.14" (15.6) | 234*, 28*** | 8h 45m*, 190h*** | 240*, 81*** | 14500*, 1649*** | IPX7 | N/A | ■ (photoluminescent) |
| 3315Z0 | 3 AA Alkaline (included) | 6.2 oz. (0.18) | 6.14" (15.6) | 138 | 19h | 146 | 5350 | IPX7 | II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130°C Da | ■ |
| 3315RZ1 | Rechargeable Lithium-Ion (included) | 6.2 oz (0.2) | 6.11" (15.5) | 176*, 22*** | 5h 30m*, 48h*** | 127*, 44*** | 4022*, 492*** | IPX7 | II 2 G Ex ib op is IIC T4 Gb, II 1 G Ex ia op is IIC T3 Ga | ■ |
| 9410L | Rechargeable Lithium-Ion (included) | 44.7 oz. (1.27) | 8.75" (22.2) | 1203*, 553*** | 4h 30m*, 10h 30m*** | 430*, 287*** | 46,328*, 20,616*** | IPX4 | N/A | ■ ■ |
| 9415Z0 | 4 D NiMH (included) | 58.2 oz (1.65) | 8.75" (22.2) | 392*, 144*** | 4h 30m*, 11h*** | 392*, 234*** | 32767*, 13747*** | IPX4 | II 1 G Ex ia IIC T4 Ga | ■ |

*High | ***Low | Additional approvals may apply. For details go to www.peli.com

| CAT NO. | BATTERIES | WEIGHT W/ BATTERIES (KG) | LENGTH (CM) | ANSI LIGHT OUTPUT | ANSI RUN TIME | ANSI BEAM DISTANCE (meters) | ANSI PEAK BEAM INTENSITY (candela) | ANSI IPX RATING | CERTIFICATIONS | COLOURS |
|---------------|-------------------------------------|--------------------------|---------------|---------------------|-----------------------|-----------------------------|------------------------------------|-----------------|---|-------------------|
| 2320 | 2 CR123 Lithium (included) | 5.6 oz. (0.16) | 5.51" (14) | 82 | 1h 15m | 145 | 5260 | IPX4 | N/A | ■ |
| 2350 | 1 AA Alkaline (included) | 3.4 oz. (0.1) | 4.2" (10.7) | 100*, 10*** | 1h 45m*, 15h*** | 141*, 44*** | 5018*, 493*** | IPX7 | N/A | ■ |
| 2360 | 2 AA Alkaline (included) | 5.4 oz. (0.15) | 6.2" (15.7) | 250*, 24*** | 2h 15m*, 19h*** | 151*, 45*** | 5692*, 512*** | IPX7 | N/A | ■ |
| 2370 | 2 AA Alkaline (included) | 6.5 oz. (0.18) | 6.43" (16.3) | 106*, 13*** | 3h 45m*, 41h 15m*** | 158*, 52*** | 6283*, 684*** | IPX4 | N/A | ■ |
| 2380 | 2 AA Alkaline (included) | 6.6 oz. (0.19) | 6.44" (16.4) | 159*, 23*** | 3h 15m*, 13h*** | 149*, 56*** | 5579*, 779*** | IPX4 | N/A | ■ |
| 2380R | Rechargeable Lithium-Ion (included) | 6.6 oz. (0.19) | 6.48" (16.5) | 305*, 30*** | 3h 30m*, 25h*** | 159*, 50*** | 6317*, 613*** | IPX7 | N/A | ■ |
| 3330 | 2 CR123 Lithium (included) | 3.45 oz. (0.1) | 5.27" (13.4) | 90 | 4h 45m | 88 | 1959 | IPX4 | N/A | ■ |
| 7000 | 2 CR123 Lithium (included) | 5.6 oz. (0.16) | 5.31" (13.5) | 602*, 311** , 64*** | 1h 30m*, 2h**, 16h*** | 233*, 165**, 75*** | 13604*, 6830**, 1409*** | IPX7 | N/A | ■ |
| 7060 | Rechargeable Lithium-Ion (included) | 10.4 oz. (0.29) | 8.65" (22) | 368*, 150**, 18*** | 3h*, 9h**, 45h*** | 199*, 125**, 43*** | 9953*, 3922**, 473*** | IPX4 | N/A | ■ |
| 8050 | Rechargeable NiMH (included) | 17.92 oz. (0.51) | 11.25" (28.6) | 164 | 2h 15m | 256 | 16448 | IPX4 | N/A | ■ |
| 8060 | Rechargeable NiMH (included) | 23.2 oz. (0.66) | 12.67" (32.2) | 803*, 447**, 25*** | 2h 30m*, 4h**, 69h*** | 359*, 265**, 62*** | 32252*, 17492**, 958*** | IPX4 | N/A | ■ |
| 2610Z0 | 3 AAA Alkaline (included) | 3.20 oz (0.91) | 1.49" (3.8) | 30*, 14*** | 19h*, 47h*** | 28*, 19*** | 194*, 91*** | IPX4 | II 1 G Ex ia op is IIC T4 Ga | ■ |
| 2680 | 4 AA Alkaline (included) | 9.7 oz. (0.27) | 4.64" (11.8) | 79 | 10h | 123 | 3789 | IPX7 | CI II III, D2 | ■ |
| 2690Z0 | 3 AAA Alkaline (included) | 4.10 oz (0.12) | 2.81" (7.1) | 74 | 11h | 92 | 2124 | IPX7 | IM1 Ex ia I Ma, II 1 G Ex ia IIC T4 Ga, II 1D Ex ia IIIC T65°C Da | ■ |
| 2720 | 3 AAA Alkaline (included) | 3.8 oz. (0.11) | 2.48" (6.3) | 80*, 5*** | 8h*, 175h*** | 56*, 15*** | 790*, 60*** | IPX4 | N/A | ■ |
| 2740 | 3 AAA Alkaline (included) | 3.3 oz. (0.09) | 2.25" (5.7) | 66*, 36*** | 7h 15m*, 21h*** | 22*, 16*** | 122*, 68*** | IPX4 | N/A | ■ □ (translucent) |

*High | **Medium | ***Low | Additional approvals may apply. For details go to www.peli.com

| CAT NO. | BATTERIES | WEIGHT W/ BATTERIES (KG) | LENGTH (CM) | ANSI LIGHT OUTPUT | ANSI RUN TIME | ANSI BEAM DISTANCE (meters) | ANSI PEAK BEAM INTENSITY (candela) | ANSI IPX RATING | CERTIFICATIONS | COLOURS |
|---------------|-------------------------------------|--------------------------|---------------|---|---|--|--|-----------------|---|------------------------|
| 2745Z0 | 3 AAA Alkaline (included) | 3.30 oz (0.94) | 2.25" (5.7) | 33*, 17*** | 20h*, 40h*** | 35*, 25*** | 309*, 155*** | IPX4 | II 1 G Ex ia IIC T4 Ga | ■ □ |
| 2750 | 3 AAA Alkaline (included) | 3.4 oz. (0.1) | 2.25" (5.7) | 193*, 63*** | 3h*, 11h*** | 98*, 58*** | 1250*, 591*** | IPX4 | N/A | ■ □ (photoluminescent) |
| 2755Z0 | 3 AAA Alkaline (included) | 3.4 oz (0.1) | 2.25" (5.7) | 72*, 34*** | 6h*, 15h*** | 57*, 40*** | 807*, 404*** | IPX4 | II 1 G Ex ia IIC T4 Ga | ■ □ |
| 2760 | 3 AAA Alkaline (included) | 3.4 oz. (0.1) | 2.25" (5.7) | 204*, 141**, 95***, 42**** | 2h*, 3h 15m**, 5h***, 11h**** | 111*, 80**, 59***, 19**** | 3065*, 1606**, 861***, 88**** | IPX4 | N/A | ■ □ (translucent) |
| 2765Z0 | 3 AAA Alkaline (included) | 3.4 oz (0.1) | 2.25" (5.7) | 105*, 104**, 65***, 33**** | 4h 15min*, 4h**, 6h 15m***, 9h**** | 107*, 93**, 63***, 9**** | 2876*, 2163**, 978***, 18**** | IPX4 | II 1 G Ex ia IIC T4 Ga | ■ □ |
| 2780 | 4 AA Alkaline (included) | 8.8 oz (0.25) | 3" (7.6) | 430*, 203**, 53*** | 1h 30m*, 3h**, 12h*** | 124*, 81**, 27*** | 3868*, 1625**, 425*** | IPX7 | N/A | ■ □ (photoluminescent) |
| 2780R | Rechargeable Lithium-Ion (included) | 8.8 oz (0.25) | 3" (7.6) | 558*, 213**, 95*** | 2h*, 3h**, 7h 30m*** | 127*, 78**, 53*** | 4060*, 1540**, 695*** | IPX7 | N/A | ■ □ (photoluminescent) |
| 2785Z1 | 4 AA Alkaline (included) | 8.82 oz (0.3) | 3.00" (7.6) | Main: 215*, 106**, 22*** Downcast: 196*, 96**, 20*** Main & Downcast: 191*, 95**, 20*** | Main: 5h*, 13h**, 98h*** Downcast: 6h*, 16h**, 100h*** Main & Downcast: 7h*, 17h**, 109h*** | Main: 108*, 76**, 34*** Downcast: 63*, 44**, 21*** Main & Downcast: 87*, 60**, 27*** | Main: 2911*, 1445**, 290*** Downcast: 1004*, 490**, 106*** Main & downcast: 1882*, 897**, 184*** | IP54 | II 2 G Ex ib IIC T4 Gb | ■ |
| 2250 | 2 AA Alkaline (included) | 0.3 oz. (0.09) | 3.87" (9.8) | 7 | 5h 30m | 54 | 726 | IPX4 | CI II, D2 | ■ |
| 3610Z0 | 4 AA Alkaline | 10.5 oz (0.3) | 7.51" (19.1) | 153 | 5h 45m | 165 | 6837 | IPX7 | II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da | ■ |
| 3660Z1 | Rech. 4 AA NiMHA | 10.5 oz (0.3) | 7.51" (19.1) | 176 | 3h 45m | 183 | 8414 | IPX7 | II 2 G Ex ib IIC T4 Gb | ■ □ |
| 3715Z0 | 4 AA Alkaline | 14.4 oz (0.41) | 5.36" (13.6) | 189*, 90***, 23**** | 4h*, 7h***, 31h**** | 249*, 157***, 24**** | 15552*, 6150***, 150**** | IPX4 | II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130c Da | ■ |
| 3765Z0 | 4 AA NiMH | 14.6 oz (0.41) | 5.36" (13.6) | 194*, 92***, 24**** | 3h 30m*, 6h 45m***, 20h 30m**** | 256*, 161***, 24**** | 16392*, 6454***, 146**** | IPX4 | II 1 G Ex ia op is IIC T3 Ga | ■ |
| 2365 | 2 AA Alkaline (not included) | 9.3 oz. (0.26) | 21.92" (55.7) | 65 | 7h | 81 | 1644 | IPX4 | N/A | ■ |

*High | **Medium | ***Low | ****Downcast | Additional approvals may apply. For details go to www.peli.com

| CAT NO. | BATTERIES | WEIGHT W/ BATTERIES (KG) | LENGTH (CM) | ANSI LIGHT OUTPUT | ANSI RUNTIME | ANSI BEAM DISTANCE (meters) | ANSI PEAK BEAM INTENSITY (candela) | ANSI IPX RATING | APPROVALS | COLOURS |
|---------|-------------------------------------|--------------------------|--------------|---|---|--|--|-----------------|---|---------|
| 1900Z1 | 2 AAA Alkaline (included) | 1.6 oz. (0.05) | 4.09" (10.4) | 11 | 1h 30m | 45 | 571 | IPX7 | II 2 G Ex e ib IIB T4 Gb, II 2 D Ex ib IIIC T100°C Db | ■ □ |
| 1930Z0 | 4 LR 44 Alkaline (included) | 0.9 oz. (0.03) | 2.64" (6.7) | 12 | 4h 15m | 17 | 70 | IPX4 | II 1 G Ex ia op is IIC T6/T4 Ga | □ |
| 1965Z0 | 2 AAA Alkaline (included) | 1.9 oz (0.05) | 5.48" (13.9) | 34 | 3h 45m | 45 | 512 | IPX7 | II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T90°C Da | ■ □ |
| 2000Z1 | 3 C Alkaline (not included) | 12.8 oz. (0.36) | 7.79" (19.8) | 39 | 6h | 177 | 7852 | IPX7 | II 2 G Ex e ib IIC T4 Gb, II 2 G Ex e ib IIC T150°C Gb | ■ □ |
| 2010Z0 | 3 C Alkaline (not included) | 13.4 oz. (0.38) | 8.11" (20.6) | 129 | 22h | 135 | 4582 | IPX7 | II 1 G Ex ia IIC T4 T3 Ga, II 1 D Ex ia IIIC T135c T200c Da IP6X | ■ |
| 2220Z1 | 2 CR2032 Lithium (included) | 1.0 oz (0.03) | 3.50" (8.9) | 9 | 34h | 12 | 38 | IPX4 | II 2 G Ex ib op is IIC T6 Gb | ■ ■ |
| 2400Z1 | 4 AA Alkaline (included) | 7.1 oz. (0.2) | 6.49" (16.5) | 38 | 4h 30m | 156 | 6194 | IPX7 | II 2 G Ex e ib IIC T4 Gb | ■ □ |
| 2410Z0 | 4 AA Alkaline (included) | 7.3 oz. (0.21) | 7" (17.8) | 153 | 5h 45m | 165 | 6837 | IPX7 | II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da | ■ □ |
| 2460Z1 | Rechargeable NiMH (included) | 7.8 oz. (0.22) | 7" (17.8) | 112 | 4h 30m | 153 | 5828 | IPX7 | II 2 G Ex ib IIC T4 Gb | ■ |
| 2610Z0 | 3 AAA Alkaline (included) | 3.20 oz (0.91) | 1.49" (3.8) | 30*, 14*** | 19h*, 47h*** | 28*, 19*** | 194*, 91*** | IPX4 | II 1 G Ex ia op is IIC T4 Ga | ■ |
| 2690Z0 | 3 AAA Alkaline (included) | 4.10 oz (0.12) | 2.81" (7.1) | 74 | 11h | 92 | 2124 | IPX7 | I M1 Ex ia I Ma, II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T65°C Da | ■ |
| 2745Z0 | 3 AAA Alkaline (included) | 3.30 oz (0.94) | 2.25" (5.7) | 33*, 17*** | 20h*, 40h*** | 35*, 25*** | 309*, 155*** | IPX4 | II 1 G Ex ia IIC T4 Ga | ■ ■ |
| 2755Z0 | 3 AAA Alkaline (included) | 3.4 oz (0.1) | 2.25" (5.7) | 72*, 34*** | 6h*, 15h*** | 57*, 40*** | 807*, 404*** | IPX4 | II 1 G Ex ia IIC T4 Ga | ■ ■ |
| 2765Z0 | 3 AAA Alkaline (included) | 3.4 oz (0.1) | 2.25" (5.7) | 105*, 104**, 65***, 33**** | 4h 15min*, 4h**, 6h 15m***, 9h**** | 107*, 93**, 63***, 9**** | 2876*, 2163**, 978***, 18**** | IPX4 | II 1 G Ex ia IIC T4 Ga | ■ ■ |
| 2785Z1 | 4 AA Alkaline (included) | 8.82 oz (0.3) | 3.00" (7.6) | Main: 215*, 106**, 22*** Downcast: 196*, 96**, 20*** Main & Downcast: 191*, 95**, 20*** | Main: 5h*, 13h**, 98h*** Downcast: 6h*, 16h**, 100h*** Main & downcast: 7h*, 17h**, 109h*** | Main: 108*, 76**, 34*** Downcast: 63*, 44**, 21*** Main & Downcast: 87*, 60**, 27*** | Main: 2911*, 1445**, 290*** Downcast: 1004*, 490**, 106*** Main & downcast: 1882*, 897**, 184*** | IP54 | II 2 G Ex ib IIC T4 Gb | ■ |
| 3315Z0 | 3 AA Alkaline (included) | 6.2 oz. (0.18) | 6.14" (15.6) | 138 | 19 | 146 | 5350 | IPX7 | II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130°C Da | ■ |
| 3315RZ1 | Rechargeable Lithium-Ion (included) | 6.2 oz (0.2) | 6.11" (15.5) | 176*, 22*** | 5h 30m*, 48h*** | 127*, 44*** | 4022*, 492*** | IPX7 | II 2G Ex ib op is IIC T4 Gb, II 1G Ex ia op is IIC T3 Ga | ■ |
| 3610Z0 | 4 AA Alkaline | 10.5 oz (0.3) | 7.51" (19.1) | 153 | 5h 45m | 165 | 6837 | IPX7 | II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da | ■ |
| 3660Z1 | Rech. 4 AA NiMHA | 10.5 oz (0.3) | 7.51" (19.1) | 176 | 3h 45m | 183 | 8414 | IPX7 | II 2 G Ex ib IIC T4 Gb | ■ □ |
| 3715Z0 | 4 AA Alkaline | 14.4 oz (0.41) | 5.36" (13.6) | 189*, 90***, 23**** | 4h*, 7h***, 31h**** | 249*, 157***, 24**** | 15552*, 6150***, 150**** | IPX4 | II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130c Da | ■ |
| 3765Z0 | 4 AA NiMH | 14.6 oz (0.41) | 5.36" (13.6) | 194*, 92***, 24**** | 3h 30m*, 6h 45m***, 20h 30m**** | 256*, 161***, 24**** | 16392*, 6454***, 146**** | IPX4 | II 1 G Ex ia op is IIC T3 Ga | ■ |
| 9415Z0 | 4 D NiMH (included) | 58.2 oz (1.65) | 8.75" (22.2) | 392*, 144**** | 4h 30m*, 11h*** | 392*, 234*** | 32767*, 13747*** | IPX4 | II 1 G Ex ia IIC T4 Ga | ■ |


*High | **Medium | ***Low | ****Downcast | Additional approvals may apply. For details go to www.peli.com

COMPARISON TABLE US (UL, FM) AND EUROPEAN (ATEX) CLASSIFICATION

| HAZARDOUS AREA ELECTRICAL GUIDELINES | | | | | |
|--------------------------------------|--|--|--------------------------------|---|-------------------------|
| | SUBSTANCE | TYPICAL ENVIRONMENTS | US CLASSIFICATIONS | EUROPEAN CLASSIFICATION | VOLATILITY* |
| CLASS 1 | Flammable Gasses, Vapors or Liquids (Acetylene, Hydrogen, Ethylene, Propane) | - Oil Refinery - - Paint Warehouse - - Offshore Oil Rig - - Spray Booth - | Division 1 (Hazard Likely) | Category 1 / Zone 0 (Hazard Certain) | MOST ↑ ↓ LEAST |
| | | | Division 2 (Hazard Not Likely) | Category 2 / Zone 1 (Hazard Likely) | |
| CLASS 2 | Combustible Dusts (Metals [Div.1 only], Coal, Grain) | - Coal Mine - - Grain Silo - - Munitions Factory - - Hay Storage Facility - | Division 1 (Hazard Likely) | Category 1 / Zone 0 (Hazard Certain) | |
| | | | Division 2 (Hazard Not Likely) | Category 2 / Zone 1 (Hazard Likely) | |
| CLASS 3 | Ignitable Fibers & Flyings (Machined Magnesium) | - Paper Mill - - Woodworking Facility - - Textile Mill - - Cotton Gin - | Division 1 (Hazard Likely) | Category 1 / Zone 0 (Hazard Certain) | |
| | | | Division 2 (Hazard Not Likely) | Category 2 / Zone 1 (Hazard Likely) | |
| | | | | Category 3 / Zone 2 (Hazard Not Likely) | |

* A torch certified to Category 1 (Zone 0) is safe for use in areas rated Category 2 (Zone 1) and Category 3 (Zone 2). Conversely the opposite is not possible. This information should be taken only as a guideline. Contact us for specific details on both, US and European Directives.

DIAGRAM OF CLASS / DIVISIONS / ZONES

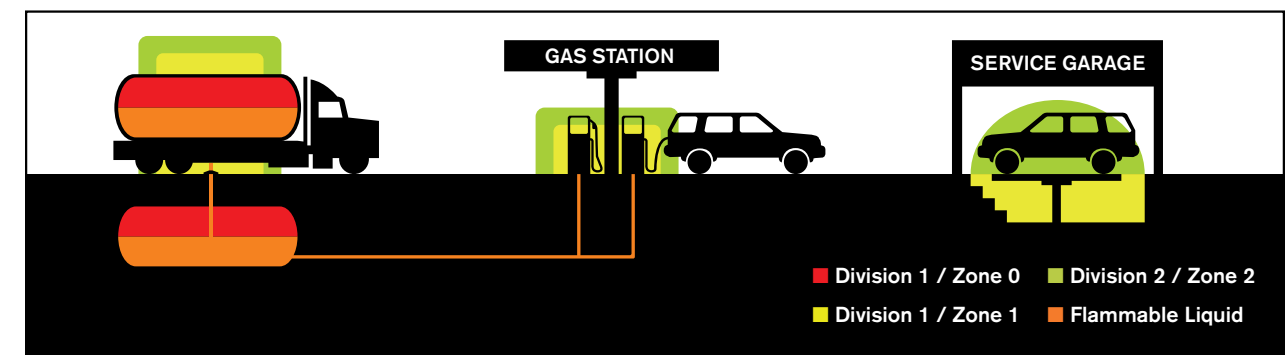


PELI + LIGHTS

PRODUCT LIGHTS OVERVIEW


REMOTE AREA LIGHTING SYSTEMS PGS 04-07



SMALL LIGHTS PGS 08-09

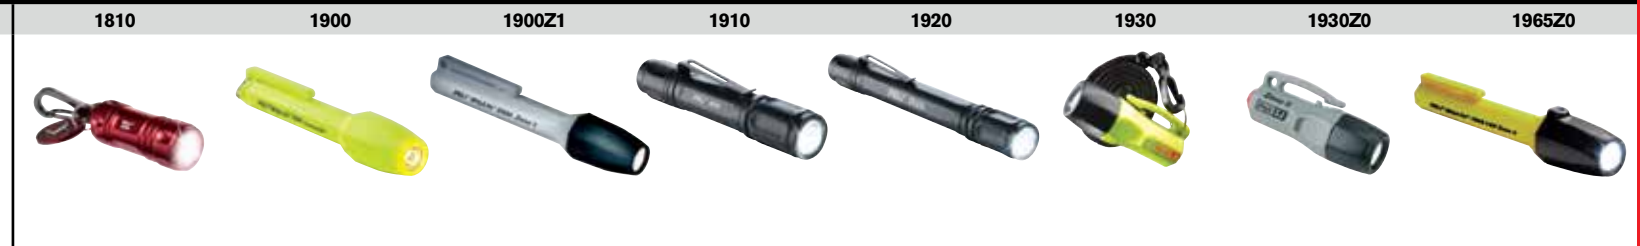

SMALL LIGHTS PGS 08-09

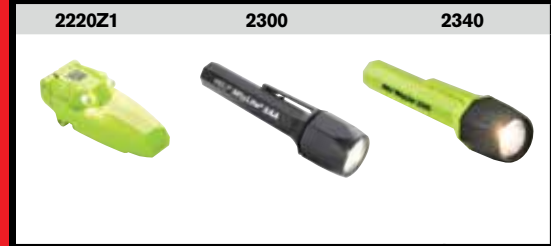


MEDIUM LIGHTS PGS 10-12



LARGE LIGHTS PGS 13



ATEX LIGHTS ZONE 0 & 1 (CAT. 1 & 2) PGS 14-17

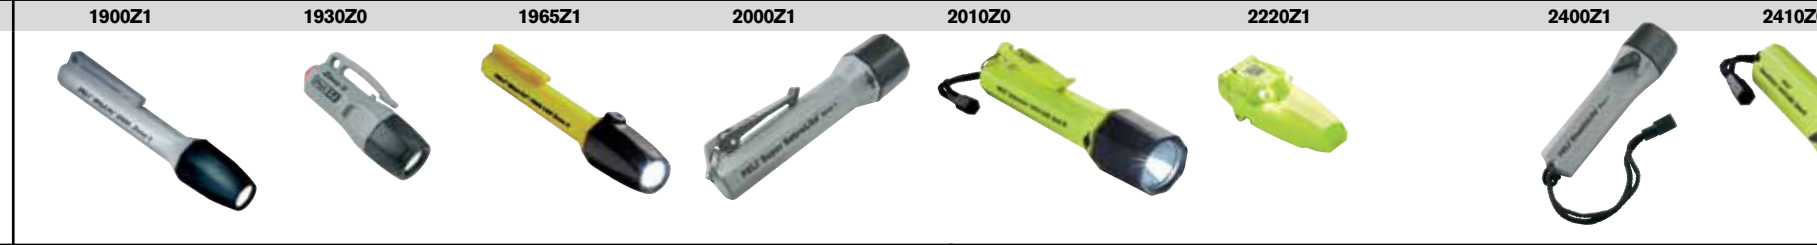

ATEX LIGHTS ZONE 0 & 1 (CAT. 1 & 2) PGS 14-17




TACTICAL LIGHTS PGS 18-19



HEADLAMPS PGS 20-23



RIGHT ANGLE LIGHTS PGS 24-25

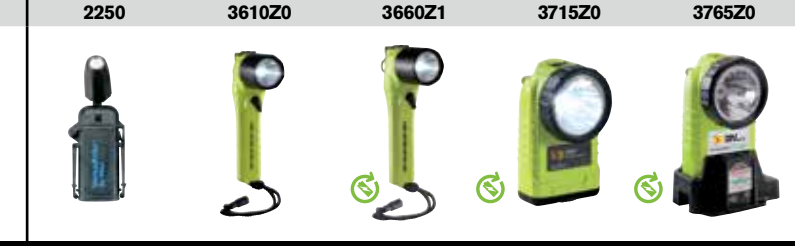

SPECIALTY LIGHTS PGS 26

